

# TX7000™ Shielded Copper Cable – S/FTP

## specifications

Category 7 cable shall meet the IEC 61156-5 Class F component standard. The conductors shall be 23 AWG construction with foamed skin PE insulation. The copper conductors shall be twisted in pairs each covered by a foil shield within an overall braided shield and a low smoke zero halogen (LSZH) jacket.



## technical information

**Electrical performance:** Certified performance in a 4-connector channel up to 100 meters and exceeds the requirements of the ANSI/TIA-568-C.2 Category 6A, ISO 11810 Class E, Edition 2.1, and IEEE 802.3an supporting 10GBASE-T transmission over twisted-pair cabling systems when used as part of the Panduit® TX6A™ 10Gig™ Shielded Copper Cabling System

Certified component performance up to 100 meters and meets or exceeds the component requirement of the IEC 61156-5 Category 7 standard

<b>Conductor/insulator:</b>	23 AWG solid copper with foamed skin PE
<b>Flame rating:</b>	IEC 60754-2, IEC 61034, IEC 60332-1-24, EN 50575: Euroclass Dca-s1a,d1,a1
<b>PoE compliance:</b>	Meets IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt for PoE applications
<b>Installation tension:</b>	110N (25 lbf) maximum
<b>Temperature rating:</b>	0° to 50°C (32° to 122°F) during installation -20° to 75°C (-4° to 167°F) during operation
<b>Cable jacket:</b>	LSZH
<b>Cable diameter:</b>	7.2mm (0.283 in.) nominal
<b>Cable weight:</b>	26.7 kg/500m (60 lbs./1640 ft.)
<b>Packaging:</b>	500m (1640 ft.) on a reel, 28.7 kg/500m (63 lbs./1640 ft.) Packaged tested to ISTA procedure 1A

## key features and benefits

<b>Individually foiled</b>	Prevents the coupling near-end crosstalk and alien crosstalk between twisted pairs to ensure 10GBASE-T transmission performance
<b>Braided shield</b>	Provides superior structural integrity and reduces low frequency external interference to ensure exceptional cable performance at
<b>Descending length cable markings</b>	Easy identification of remaining cable reduces installation time and cable scrap
<b>Bulk packaging</b>	Supplied 500 meters to a reel

## applications

TX7000™ Shielded Copper Cable is a component of the TX6A™ 10Gig™ Shielded Copper Cabling System. This end-to-end system provides a cost effective media for ensuring that the most challenging network bandwidth needs are easily met today and tomorrow. Businesses are placing increased reliance on their networks to efficiently pass vital and time sensitive information throughout their enterprise. Usage of TX6A™ 10Gig™ Shielded Copper Cabling System include:

- Data center high bandwidth applications for switch-to-switch links, storage area networks aggregation of data
- 3-D modeling and work group file transfer
- Web-enabling applications, such as Voice over Internet Protocol (VoIP) and live video/audio broadcasting

### TX6A™ 10Gig™ Shielded Copper Cabling System

#### TX7000™ Shielded Copper Cable

**LSZH:** PSL7004\*-CED

#### Mini-Com® TX6A™ 10Gig™ Shielded Jack Module

**Jack module:** CJS6X88TG

#### TX6A™ 10Gig™ Shielded Patch Cords

**Meters:** STP6X\*\*MIG  
**Feet:** STP6X\*\*IG

#### Mini-Com® All Metal Angled Modular Patch Panels

**24-port, 1 RU:** CPA24BLY  
**48-port, 2 RU:** CPA48BLY  
**72-port, 2 RU:** CPA72BLY

#### Mini-Com® All Metal Flat Modular Patch Panels

**24-port, 1 RU:** CP24BLY  
**48-port, 2 RU:** CP48BLY  
**72-port, 2 RU:** CP72BLY

#### Cable Prep Tools

**Wire snipping tool:** CWST  
**Wire stripping tool:** CCAST

\*To designate color, add suffix WH (White), DG (Dark Gray), IG (International Gray), and LG (Light Gray). For additional cable colors, contact customer service.

\*\*For lengths 1 to 10 meters (increments of one meter) and 1.5, 2.5, 15, 20 meters, change the length designation in the part number to the desired length. For standard cable colors other than IG (International Gray) substitute IG suffix with BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) to the end of the part number. For example, the part number for a blue, 15-meter patch cord is STP6X15MBU.


\*\*\*For lengths 3 to 20 feet (increments of one foot) and 25, 30, 35, 40 feet, change the length designation in the part number to the desired length. For standard cable colors other than IG (International Gray) substitute IG Suffix with BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) to the end of the part number. For example, the part number for a blue, 15-foot patch cord is STP6X16BU.

# TX7000™ Shielded Copper Cable – S/FTP

## additional specifications

Mechanical Test	
Minimum Bend Radius	8 x cable diameter
Electrical Test	
DC Resistance	≤95 ohm per km
Loop Resistance Unbalance	<2%
Mutual Capacitance	≤5.6 nF/100m (@ 1kHz)
Capacitance Unbalance	≤1600 pF/km (pair/ground)
Characteristic Impedance	100 ± 15 ohm up to 100 MHz
Nominal Velocity of Propagation (NVP)	74% nominal

## cable construction

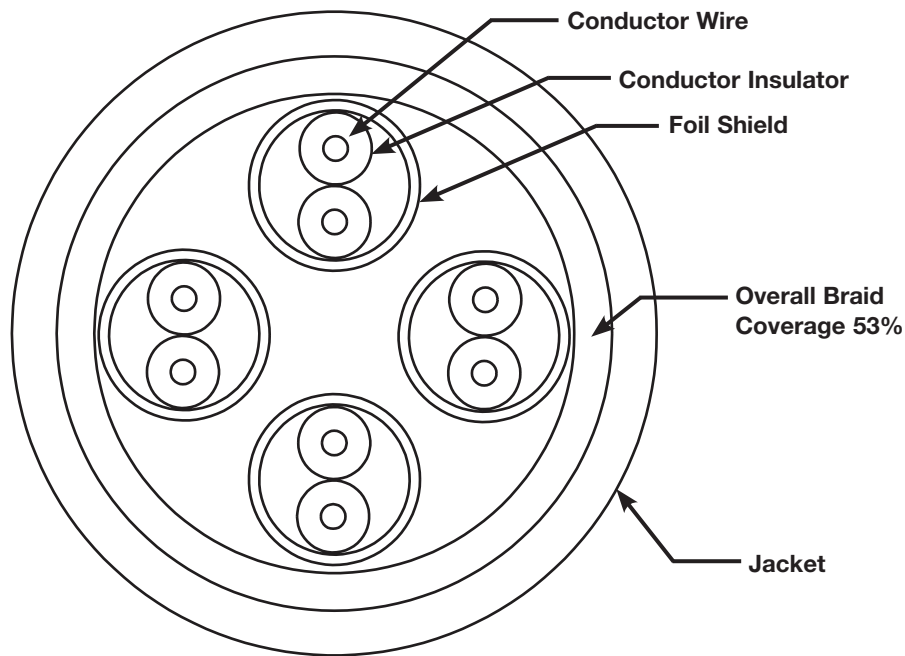

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT**®

© 2018 Panduit Corp.  
ALL RIGHTS RESERVED.  
COSP440--SA-ENG  
Replaces WW-COSP176  
7/2018