

# CS-T3C-A0-BG

Smart Button



## Introduction

T3C, a smart button with dual modes (must be paired with the A3). It supports two modes of arming and disarming mode/emergency call mode. The mode can be switched through the EZVIZ APP to select the function more suitable for the home environment.

## Main Features



Two-in-one Remote Control



Easy Pairing




Placed at Anywhere



Low Power Consumption and Long Battery Life

## Dimensions

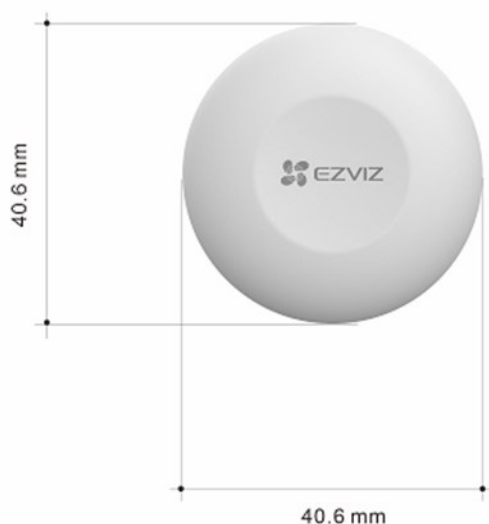

# Specifications

<b>Model</b>	CS-T3C-A0-BG
<b>Sensor Type</b>	
<b>Sensor Type</b>	Switch Button
<b>Tap Time</b>	
<b>Single Click</b>	<2s
<b>Double click</b>	Interval Time <0.5s
<b>Long Press</b>	≥2s
<b>Function</b>	
<b>Low Battery Reminder</b>	Supports
<b>Tamper Alarm</b>	Supports
<b>Installation Method</b>	Double-sided adhesive paste
<b>Mode</b>	Arming and Disarming Mode, Emergency Call Mode
<b>Battery</b>	
<b>Battery Type</b>	CR2032
<b>Battery Life</b>	1.5 years (calculated by 15 clicks a day)
<b>Network</b>	
<b>Protocol</b>	ZigBee 3.0
<b>Wireless Frequency</b>	2.4 GHz
<b>Communication Distance</b>	> 250m (open environment)
<b>General</b>	
<b>Operation Conditions</b>	-10° C ~ 55°C ( 14°F to 131 °F ), Humidity 95% or less (non-condensing)
<b>Storage Temperature</b>	-20°C ~ 60°C ( -4°F to 140°F )
<b>Operating Voltage</b>	DC 3V
<b>Working Current</b>	Static State ≤10μA, Up to 25mA
<b>Dimensions (mm/inch)</b>	φ40.6mm x 12.3mm (φ1.6" x 0.5")
<b>Suttle Weight (g/lb)</b>	13g (0.4oz)