



## 2-Way Radio Callbox

# DMR Digital

### Put Communication Right Where You Need It!

Position the DMR Series digital radio callbox virtually anywhere to maximize manpower efficiency, improve safety or service response times. Deploys easily — no wires, no trenching, no construction required. Can be used stand-alone using alkaline batteries or can be powered using external AC adapter. The DMR Series callbox provides crisp, clear, long range voice communication and allows staff and visitors to communicate with your DMR radio-equipped personnel from points near and far, be it the plant floor, a maintenance garage, the gated entrance, a delivery dock or the 9th Tee.

### Features / **Benefits:**

- Wireless, Push-To-Talk, 2-Way, DMR Digital, Tier 2(12.5kHz) Technology  
**No Costly Trenching or Construction.**
- Enhanced Digital Performance, Business Band Frequencies  
**Long Range — Up to 1 Mile\*, Line-Of-Sight. Works with Any Other DMR Business Band 2-Way Radio.**
- Rugged, High-Impact Gasket Sealed Enclosure  
**Durable, Sealed and Weatherproof For Outdoor Use**
- Internal Antenna, Tough, Machined-Aluminum PTT Button  
**Long-Life, Tamper and Vandal-Resistant**
- Battery Powered or External Power Capable  
**No Wires, Stand Alone Operation or Can Be Externally Powered with Optional AC Adapter For Always-On Operation**
- High Audio Output Capability  
**Adjustable Volume - Loud, Easy To Hear In Loud Environments**
- PC Programmable and User Adjustable Settings  
**Allows Easy, In-The-Field Programming**
- Recordable Voice Messages  
**Automatic Messages Increase System Usefulness**
- Built-In Relay Control  
**Allows Long-Range, Remote Control Of Gates Or Doors**
- Standard Flange Mount Hole Pattern  
**Easy Installation. Optional Mounting Brackets Available**
- Choice of 2 Enclosure Colors  
**Pick The Color Best Suited To Meet Your Need:**  
-High Visibility Green and Coal Black  
-Custom Colors Available For Volume Application

This device is not yet approved by the FCC and is not available for sale or lease.




**Applications...** Schools and Day Cares • Manufacturing and Construction Sites • Health Care Facilities • Delivery Docks • Gate Secured Areas • Amusement Parks and Resorts



# DMR Digital 2-Way Radio Callbox

## Accessories...



Strobe Light




Goose Neck Mounting Bracket



PN RPS-EXPO AC Power Adapter



Solar Power Kit

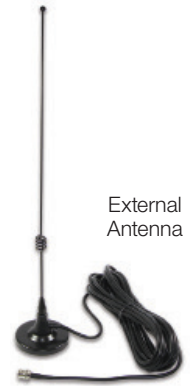

External Antenna

## Specifications...

Models	Description -DMR Digital	TX Pwr Using 3 D-Cells	TX Pwr Using Ext 12VDC Pwr	Includes Built-In Relay, Stored-Voice Msg, Sensor Switch Inputs
RQX-117DMR	VHF, 150-160 MHZ, Part 90 Freqs, Hi-Viz Green Housing	700mW	2 Watts	Yes
RQX-117DMR-BLK	VHF, 150-160 MHZ, Part 90 Freqs, Black Housing	700mW	2 Watts	Yes
RQX-417DMR	UHF, 450-470 MHZ, Part 90 Freqs, Hi-Viz Green Housing	700mW	2 Watts	Yes
RQX-417DMR-BLK	UHF, 450-470 MHZ, Part 90 Freqs, Black Housing	700mW	2 Watts	Yes
No. of RF Channels:	1			
Signaling-DMR Digital Mode:	16 Color Codes, Subscriber Unit ID (SUID), Destination ID (Individual & Group Selective Call, All-Call)			
Dimensions:	7" H x 5" W x 3" D			
Weight:	2.75 lbs			
Enclosure Material:	Gasket Sealed, High-Impact Polycarbonate			
Colors:	Black or High-Viz Green			
Environmental:	Splash resistant, shock and vibration per Ritron test			
Operating Temperature:	-20°C to +55°C (-4°F to 131°F) Battery rating. At 0°C the capacity is < 50% rated) Talk range will decrease at low temperatures when operating on alkaline batteries.			
Programming:	Field programming capability of limited parameters. Full programming capability using internal USB Connector used for full PC Programming.			
Remote Control Relay :	Can be used to remotely control gates, doors or strobe light. Relay switch is controlled when callbox receives the pre-programmed selective signaling command code. SPDT, 3A, 125VAC/30VDC – Normally Open or Normally Closed (NO Default). Modes of Operation: Momentary or Toggle, On/Off.			
Aux Sensor Monitoring Input :	Optional sensors used to detect motion, gate movement, vandal/tamper or vehicle presence can be connected to the callbox using the sensor input. Sensor input responds to an Open or Closed switch. Callbox will send either an alarm tone or a recordable voice message when optional switch/sensor detects a change. Can also be programmed to automatically turn callbox ON and transmits recordable voice message or alarm tone to radios monitoring callbox activity.			
Adjustable Speaker Volume:	Adjustable 20% to 100%			
Automatic Turn-Off Feature:	Conserves batteries. Selectable turn-off times will automatically turn callbox off after a set period of inactivity on the radio channel. Auto Turn-OFF feature must be enabled when using battery only power.			
Listen-In Feature:	Callbox can be selectively paged to allow remote monitoring of audio in the vicinity of the callbox.			
Busy Channel TX Inhibit:	Prevents Callbox from transmitting if someone else is using the radio channel.			
<b>Recordable Voice Messages</b>				
1. Greeting Message:	12 sec length max, for benefit of visitor, plays only on the callbox speaker when the On/PTT button is 1st pressed.			
2. Send Call Alert Message:	4 sec length max, transmitted to radios monitoring callbox activity when On/PTT button is 1st pressed.			
3. Send Sensor ON Message:	4 sec length max, transmitted to radios monitoring callbox activity when the Sensor Input goes low.			
4. Send Sensor OFF message:	4 sec length max, transmitted to radios monitoring callbox activity when the Sensor Input goes high.			
5. Send Low Battery Message:	4 sec length max, transmitted to radios monitoring callbox activity when low battery is detected.			
6. Send Power Fail Message:	4 sec length max, transmitted to radios monitoring callbox activity when loss of External 12 VDC is detected.			
Automatic Voice Message "Re-Send":	When Alert message from Callbox is not immediately answered, Alert message will automatically be "re-sent" up to 5 times. Selectable 0-5 times.			
<b>Battery Life**</b>				
3 D-Cell Batteries:	Alkaline (Ritron recommends Energizer brand cells)			
Number of Transmissions:	Approximately 8,000 based on duty cycle stated below			
Duty Cycle:	3 seconds receive, 3 seconds transmit, 10 seconds standby			



\*Actual range may be reduced by man-made obstructions, foliage, or terrain.

\*\*Each callbox application is unique, to compute the expected battery life of your callbox application, visit the Ritron Battery Life Calculator at [www.ritron.com/BLcalculator](http://www.ritron.com/BLcalculator).

**Call 800-USA-1-USA (872-1872) or visit [www.ritron.com](http://www.ritron.com)**



**Founded in 1977, Ritron, Inc. specializes in the design and manufacture of commercial and industrial-grade wireless voice and data communication equipment.**

505 West Carmel Drive, Carmel, IN 46082 • PH: 317-846-1201 • FX: 317-846-4978 • email: [sales\\_info@ritron.com](mailto:sales_info@ritron.com) • website: [www.ritron.com](http://www.ritron.com)

© 2017 Ritron, Inc. All rights reserved. Ritron is a registered trademarks of Ritron, Inc. PN: DMR Series 3/2017