


Model Number : ACCESS-184/500

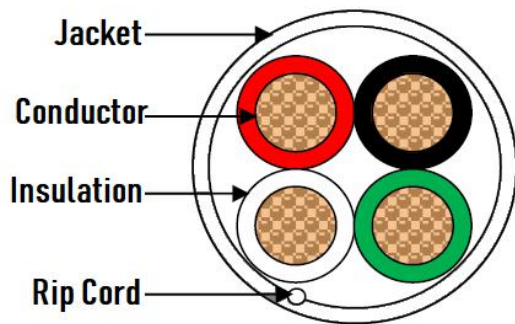

4 Core 18AWG Stranded Copper Conductor
Individual insulation of High-Quality FRPVC
Outer Sheath PVC cover with anti-flame CM Ratings

*The Drawings above is just for reference

Applications:

Industry: Access Control applications, analog signals ON / OFF.

Security: Alarms and access control, connection of the control panel with accessories such as motion sensors, magnetic plates and counters, etc.

Audio: Connecting speakers.

Physical Characteristics

Conductor

Size	0.80mm ²
Formation	STR 16/30AWG x 4C
Conductor	Pure Copper

Insulation

Average Thickness	0.25mm
Nom. Diameter	1.8 ± 0.1mm
Material	FR PVC- Fire Resistant Polyvinyl Chloride
Color	Black , Red , Green , White

Shielded

N/A

Rip Cord

Yes

Jacket

Average Thickness	0.6mm
Nom. Diameter	5.6 ± 0.2mm
Material	CM Ratings PVC-Polyvinyl Chloride
Color	White
RoHS Compliant	Yes

Mechanical Characteristics

DC Resistance, Max Ohm/KM (20°C)	21.80
Capacitance	22.5 pF/ft. nom.
Impedance	67 Ohms nom
Temperature	-20°C to 60°C
Operating Voltage	Max. 300 Volts

Packing

500FT/152.4M- Easy Pull Box

Industry Standard

ISO 9001:2015