

Product Introduction

AX Series Hybrid Panel

Increasing Security Needs

Fast & stable

Multi-path communications

Easy management

Flexible installation

Multi configuration

High compatibility

Video verification

reduce false alarms.

provide evidence.

Alarm system with video verification is a clear trend in the future.

Provide high quality **video verification** instead of low resolution **Image verification**.

Intrusion With Vision



WHAT DO WE HAVE

FEATURES / ADVANTAGES

PERIPHERAL & APPLICATION

WHY HIKVISION


PART 1

WHAT DO WE HAVE

- Product Family
- Naming Rule
- Specifications

AX Hybrid Panel Family

HIKVISION

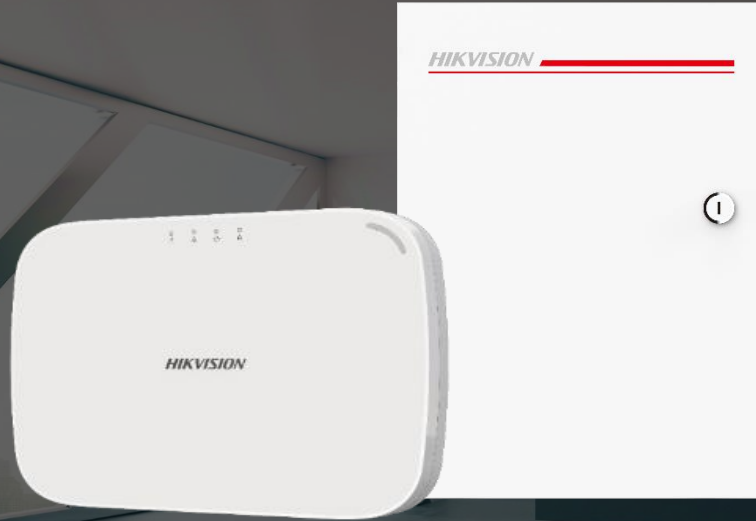


20/64 Zone Optional


Metal/Plastic Shell Optional

GPRS/4G/PSTN Optional

Wired & Wireless Support

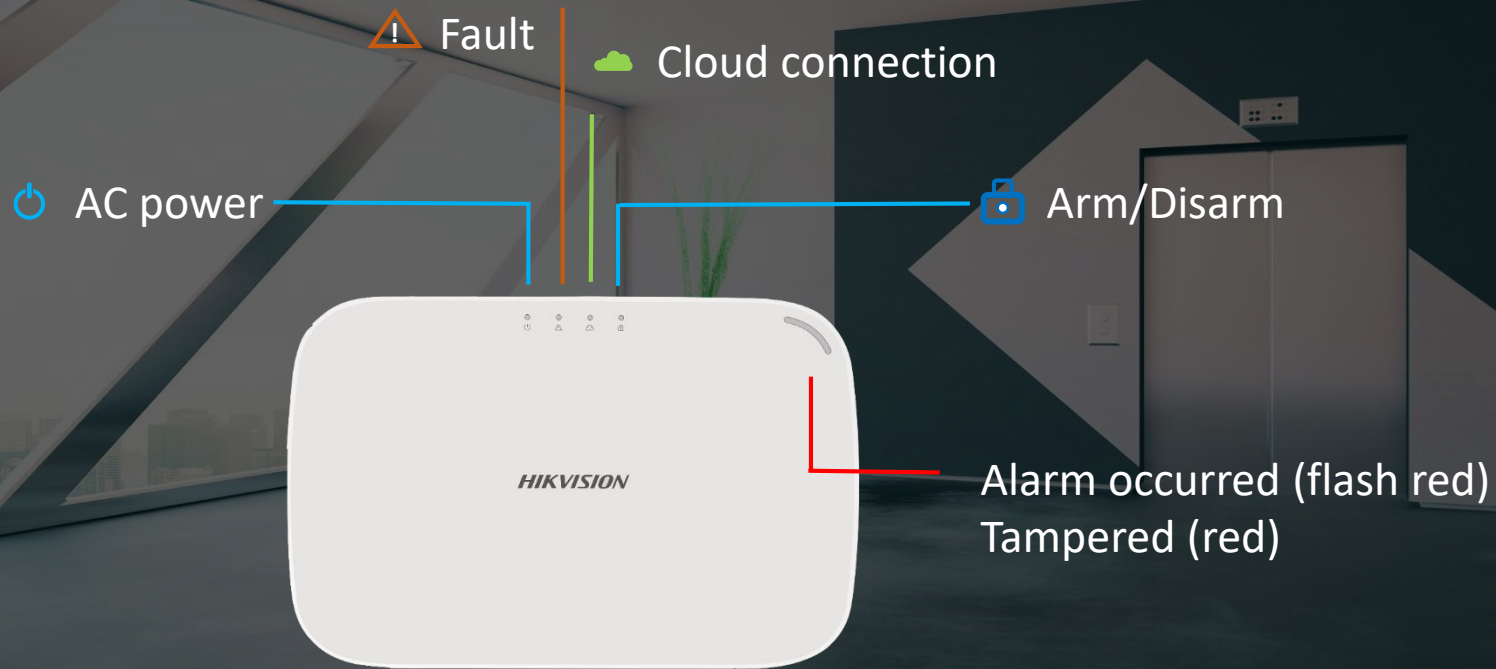

Naming rule

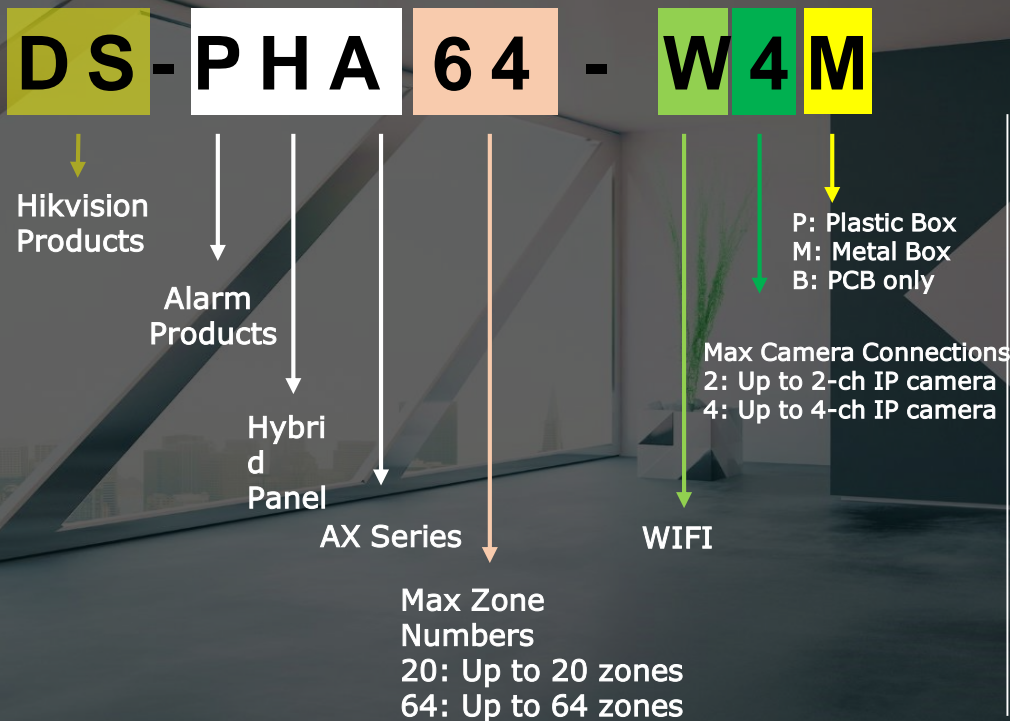

Available Models:

- DS-PHA20-P
- DS-PHA20-M
- DS-PHA64-M
- DS-PHA20-W2P
- DS-PHA20-W2M
- DS-PHA64-W4M
- DS-PHA20-B
- DS-PHA64-B
- DS-PHA20-W2B
- DS-PHA64-W4B

E.g.: DS-PHA20-W2P AX hybrid panel with plastic box, supports up to 20 zones, supports WIFI and 2 IP camera.

Highlights

Flexible choice for Entry Level Market

- Enough on-board Zone
- Selectable communication Module(2/3/4G/WIFI/PSTN)
- Flexible Components collocation
- Video verification by free App

Friendly Design for Different Scenarios

- Plastic housing is for residential and SMB
- Metal housing can be used for professional Scenarios
- LED on board ,show you the status obviously (plastic version)

Attention to some requirements

- Installation Scenarios
- Amounts of Zones and Outputs
- Communication methods



20/64 zones version selectable

Hybrid system support

Up to 16/56 wireless inputs

4/8 onboard inputs (expandable to 20/64)

2/4 onboard outputs (expandable to 20/64)

4/8 partitions, 9 wired keypads

1 onboard siren interface (2 wireless sirens expandable)

Multi-path communications

Mutli-setup options (Web, IVMS4200, Hik-connect)

IVaaS – 7 seconds video verification

(5s pre-alarm + 2s after-alarm or reversed)

PART 2

- IVaaS
- AP & STA Mode
- Multi Reporting Pathway
- Multi Configuration Tool
- Multi Arm/disarm Methods

FEATURES • ADVANTAGES


Models available



AX Hybrid Panel - Plastic

- ◆ Plastic shell
- ◆ 4 inputs onboard and expandable to 20
- ◆ 2 outputs onboard and expandable to 20
- ◆ 4 partitions
- ◆ 9 wired keypads
- ◆ Built-in IP module, PSTN/GPRS/4G module optional
- ◆ 4200/Webserver/APP Hik-Connect
- ◆ SIA DC09
- ◆ WIFI
- ◆ 2 IPC for video verification

- ◆ Metal shell
- ◆ 4/8 inputs onboard and expandable to 20/64
- ◆ 2/4 outputs onboard and expandable to 20/64
- ◆ 4/8 partitions
- ◆ 9 wired keypads
- ◆ Built-in IP module, PSTN/GPRS/4G module optional
- ◆ 4200/Webserver/APP Hik-Connect
- ◆ SIA DC09
- ◆ WIFI
- ◆ 2/4 IPC for video verification

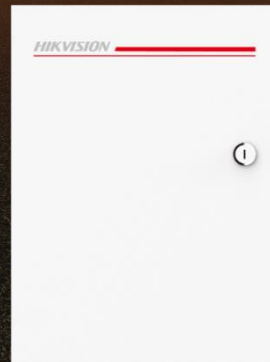

AX Hybrid Panel - Metal

Multi-path communications



Report to ARC via LAN/WIFI/4G



Report to APP via LAN/WIFI/4G



Report to Mobile phone via SMS



Report to ARC/CMS via PSTN

Multi Arm/Disarm Methods

Arm/Disarm

- Keypad
- APP
- IVMS4200
- Keyfob



Configuration

- ▽ Hik-Connect APP
- ▽ Web server
- ▽ IVMS 4200




AP and STA mode

AP Mode (Access Point)



- ◆ In AP mode, AX Hybrid panel works as a WIFI access point. Installers can configure hub from mobile/PC/tablet using web browser one connect to hub WIFI.


STA Mode (Station)

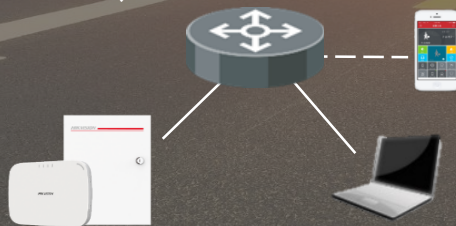

- ◆ In STA mode, the hybrid panel works as general panels. Installers can connect the panel with mobile phone or pc via external WIFI AP or LAN connection.

HD video verification via Cloud.

This solution is good for our current CCTV customers, they already use HIKVISION cameras and Cloud, and now want to develop alarm business.

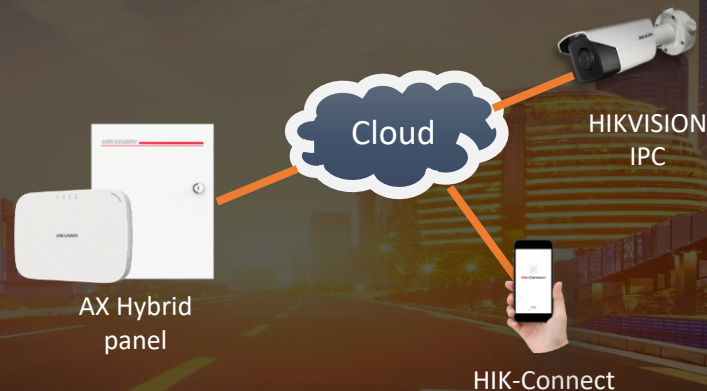


- ◆ This delivers HD video for verification, when the alarm is triggered, a pop-up will appear with a live video view of the event.

Option 1
Live HD Video via Hik-Connect

Video Verification Via Sub-stream

Support both Hikvision IPC and ONVIF IPC of other manufactures.
For customers with their private cloud and APP, we can also provide open API for integration.

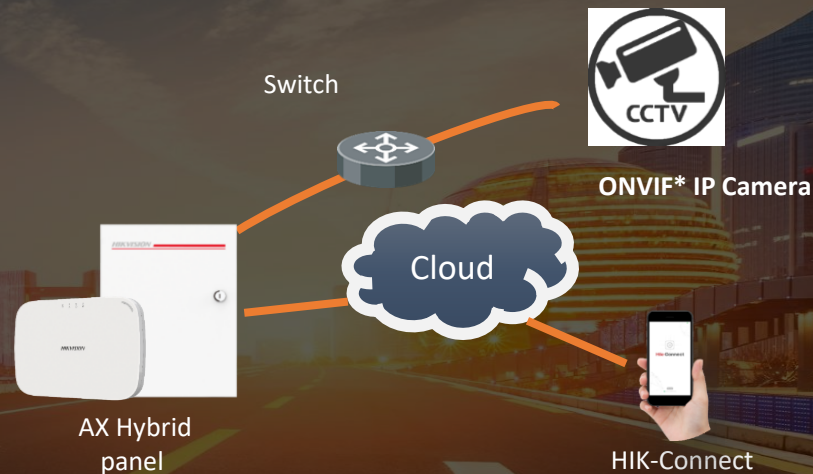

- ◆ Support up to 2/4 IPC connect directly with panel. When the alarm is triggered, a 7 seconds video will be delivered to the mail or APP, including 5 seconds before and 2 seconds after the activation or reversed.

Option 2 On board verification method

*ONVIF originally was an acronym for
Open Network Video Interface Forum.

PART 3

PERIPHERAL & APPLICATION

- Peripheral products
- Application scenarios

Peripherals



Detectors



Siren



Keypad/Keyfob



Wireless Receiver




Hybrid Panel



Expander

System topology

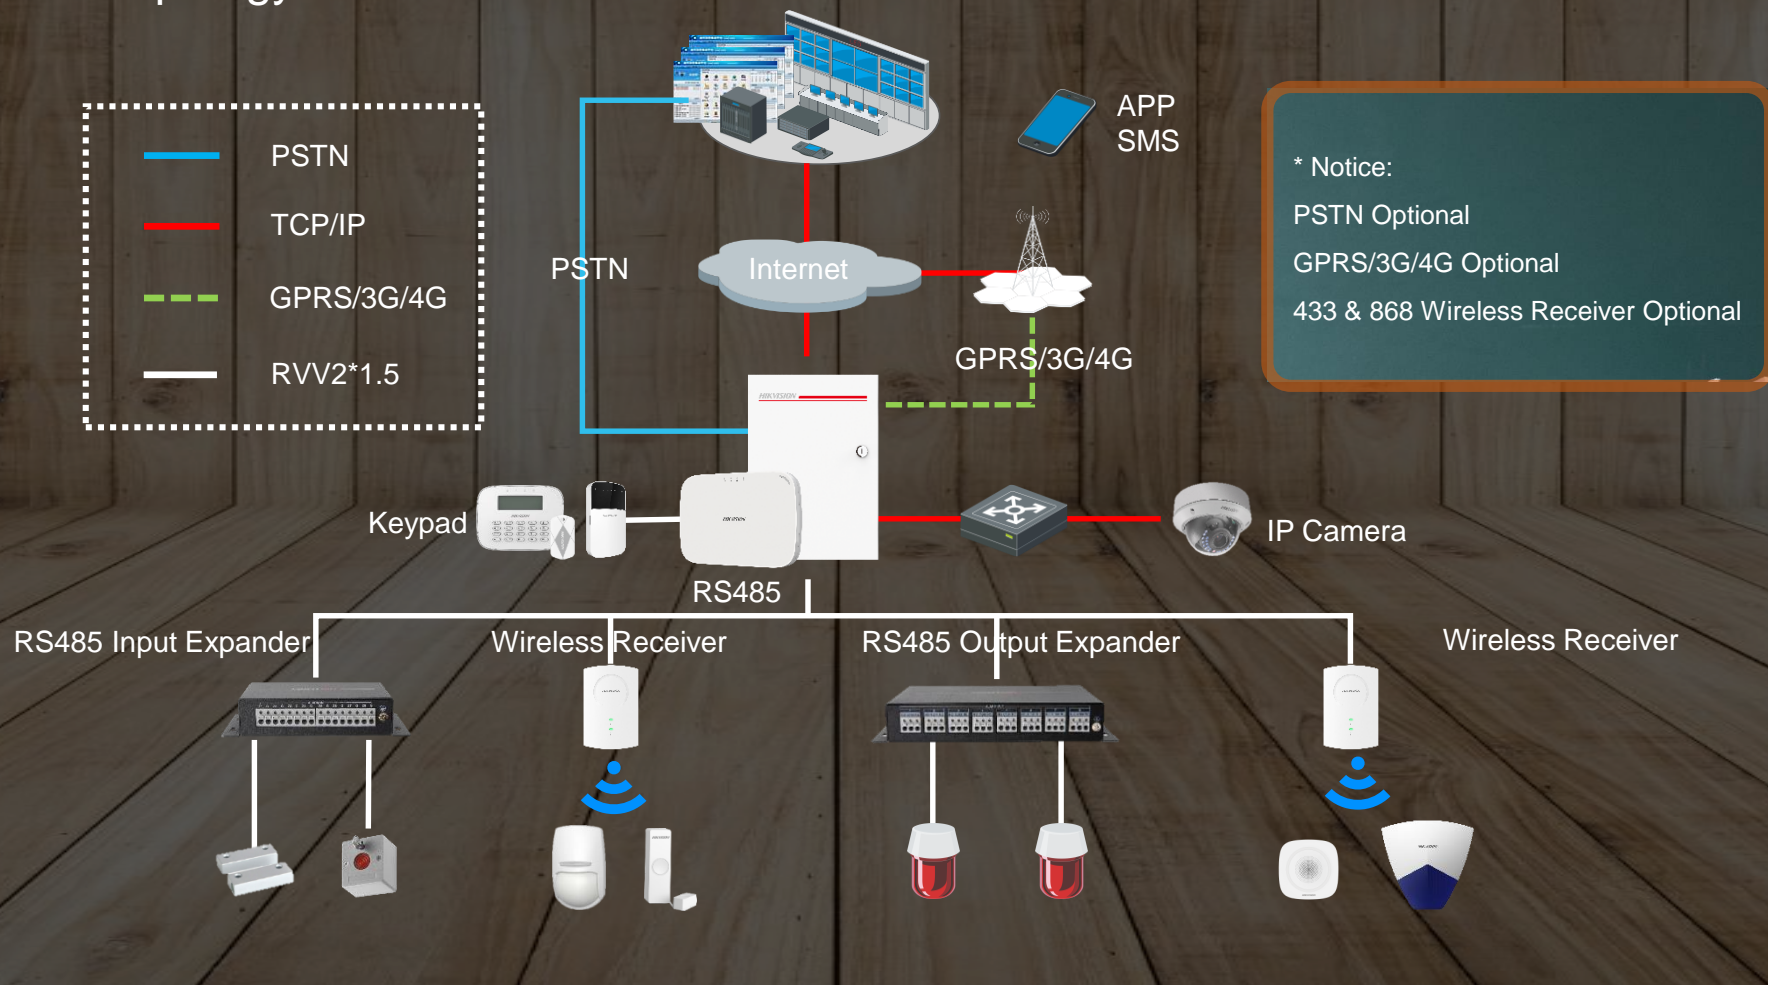

Applications



Bank



Factory



Hotel



Office




Retail




Villa

Application: Residence

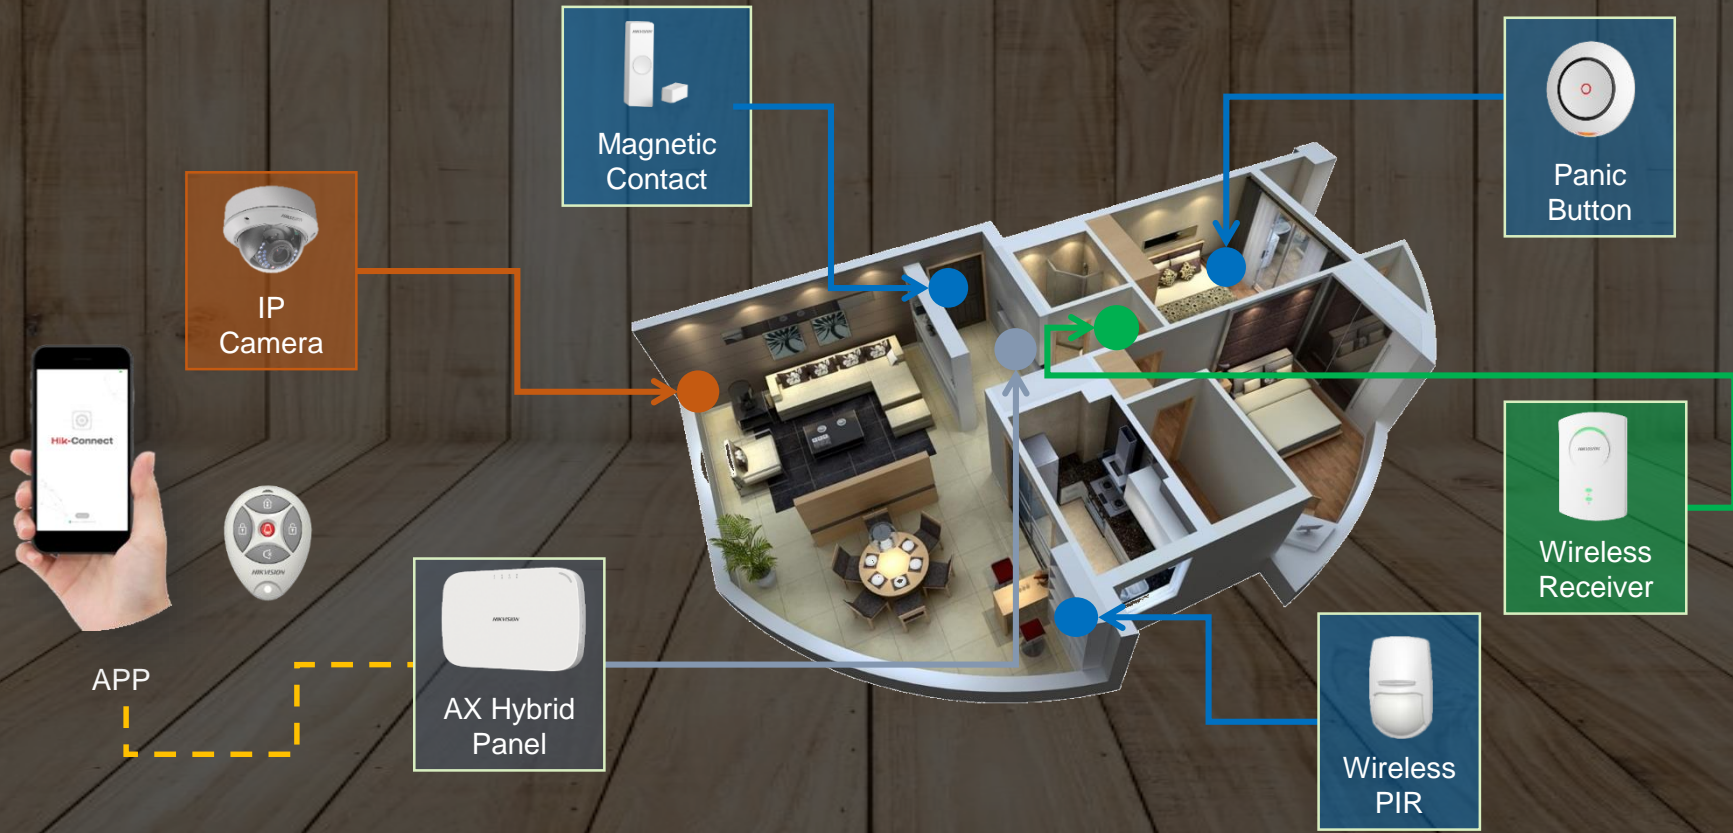

Application: Bank

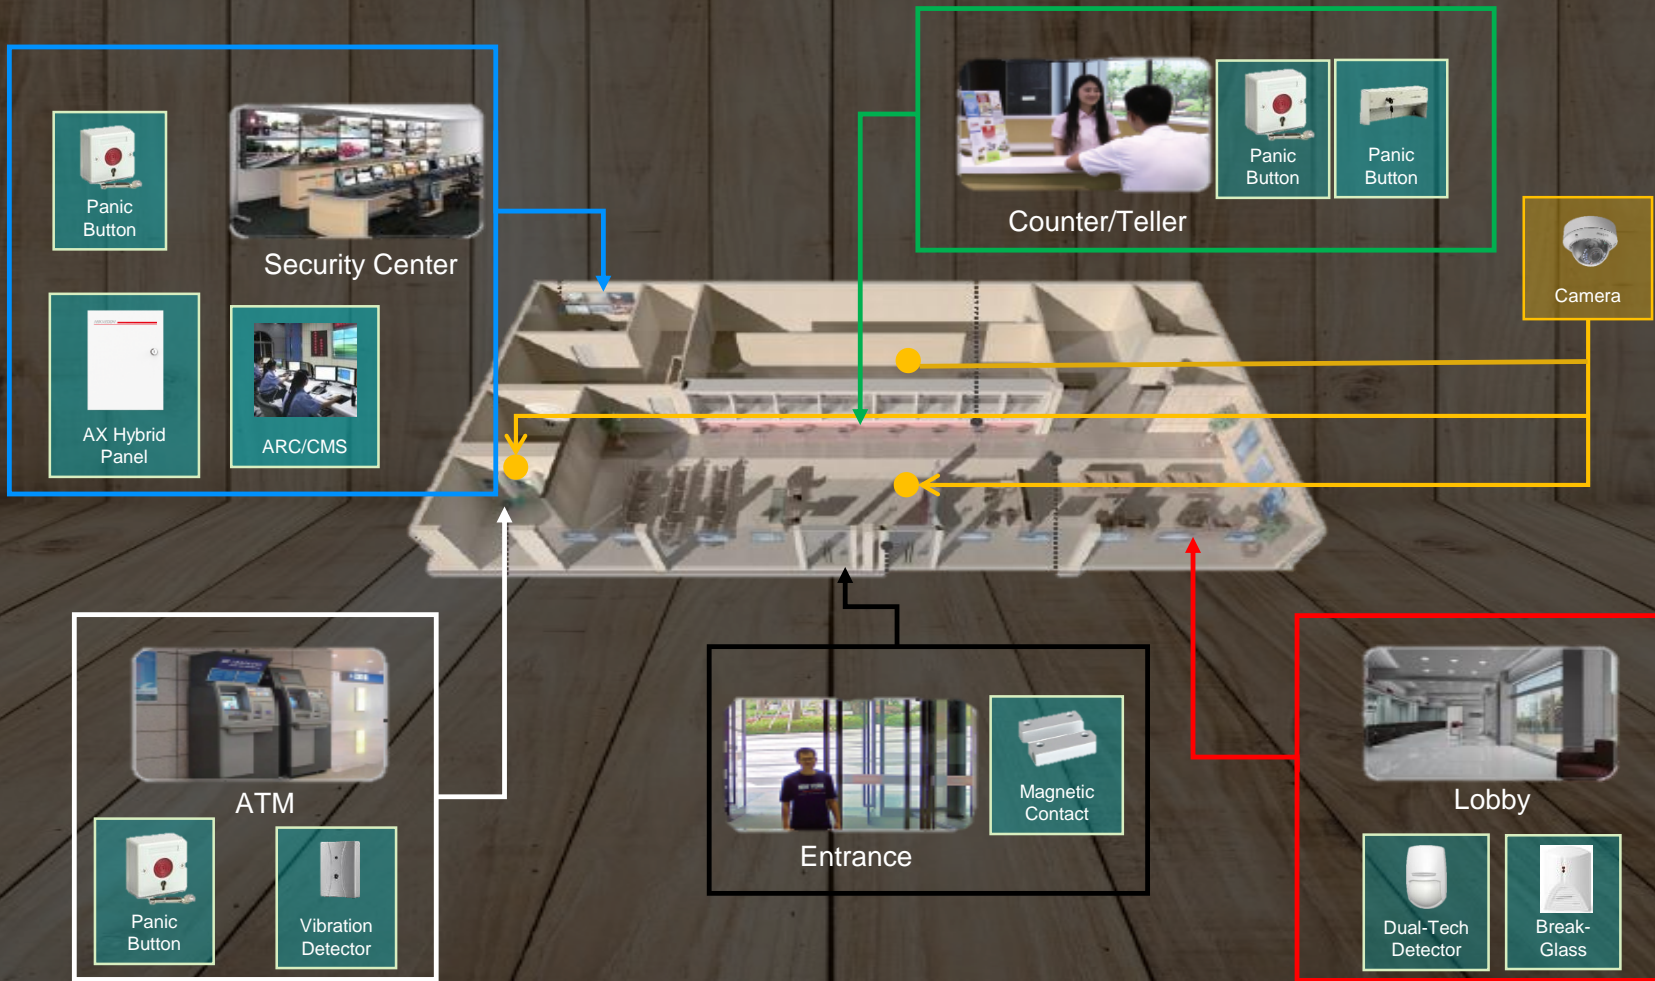

PART

4

WHY HIKVISION

- Advantage Analysis

Hikvision DS-PHA20



Input: 4/20
 Output: 2/20
 2G/3G/4G/WIFI/LAN
 Video verification
 Plastic/Metal housing option
 Dual-Path communication

DSC Neo HS2016



DSC PowerSeries PC1616



DSC PowerSeries PC1832



Paradox Spectra SP5500



Paradox Maqellan MG50



input	output
6/16	2/22
6/32	2/14
8/32	2/14
5/32	2/18
5/32	4/20

Our Advantages

- Plastic Housing , LED on surface.
- 2 ONVIF IPC for Video verification
- Wifi supported
- Support 4 partitions (than 2)
- Embedded Webserver

- Plastic Housing , LED on surface.
- 2 ONVIF IPC for Video verification
- Wifi supported
- Embedded Webserver

- Plastic Housing , LED on surface.
- 2 ONVIF IPC for Video verification
- Wifi supported
- Embedded Webserver

- Plastic Housing , LED on surface.
- 3G/4G/Wifi supported
- Free App/Cloud
- Video verification by 2 IPC connected with Panel directly

- Plastic Housing , LED on surface.
- 3G/4G/Wifi supported
- Free App/Cloud
- Video verification by 2 IPC connected with Panel directly


Selectable Module

High Cost-Performance

Video Verification

Free APP/cloud

Hikvision DS-PHA64



Input: 8/64
 Output: 4/64
 2G/3G/4G/WIFI/LAN
 Video verification
 Plastic/Metal housing option
 Dual-Path communication

DSC Neo HS2064



DSC PowerSeries PC1864



Satel Integra 64



Paradox MG6250



input output

8/64 4/80

- Plastic Housing , LED on surface.
- 4 ONVIF IPC for Video verification
- Wifi supported
- Embedded Webserver

8/64 4/16

- Plastic Housing , LED on surface.
- 4 ONVIF IPC for Video verification
- Wifi supported
- Embedded Webserver

16/64 16/64

- LED on surface (plastic version)
- 4 ONVIF IPC for Video verification
- 3G/4G/Wifi supported
- Embedded Webserver

2/64 2/8

- Video verification by 4 IPC connected with Panel directly
- 3G/4G/Wifi supported
- Embedded Webserver
- Free App/cloud



See far, go further