

C6P (ez360 Pano)

360° Fisheye Security. Zero Blind Spots.

A panoramic Wi-Fi camera offering complete coverage without any blind spots.

Key Features



Premium metal body. Excellent design and production quality for extreme durability.



Triple HD resolution 3 megapixels and fisheye up to 1344*1344



360° omnidirectional monitoring. One camera, complete coverage.



Quad Split-Screen



2.4GHz/5GHz dual band Wi-Fi. Smart configuration via QR code.



True Day/Night camera with auto-switching. Infrared night vision up to 7.5 meters.



Two-way audio. Pickup distance up to 5 meters.



Supports MicroSD card up to 128GB






Multiple viewing modes


Enjoy four different screen viewing modes to meet your specific needs.








Expanded View



Dual-Screen




Quad-Screen




Dual-band Wi-Fi

Supports 2.4 GHz and 5.0 GHz Wi-Fi connectivity, ensuring stable and smooth wireless transmission.

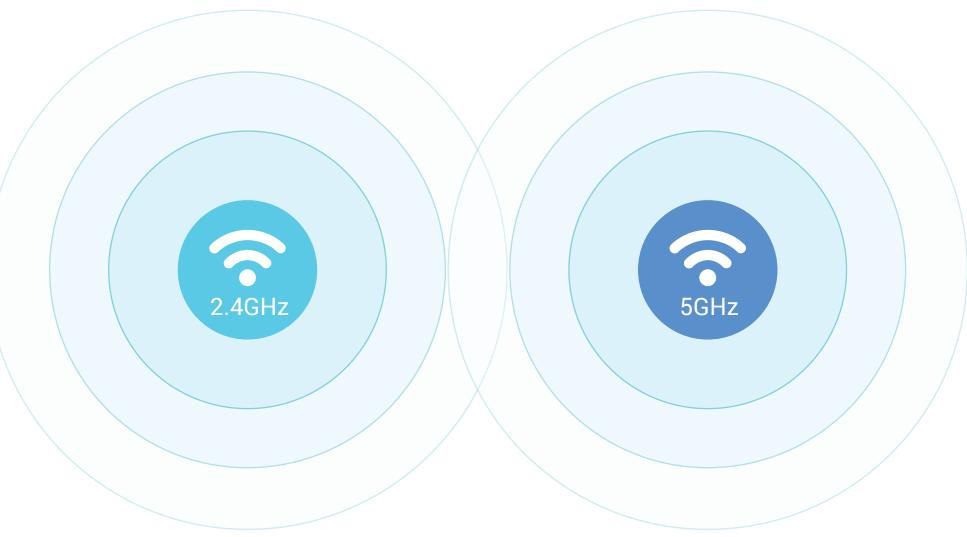

Two-way audio

The built-in microphone and speaker deliver crystal-clear, smooth voice transmission in real time.

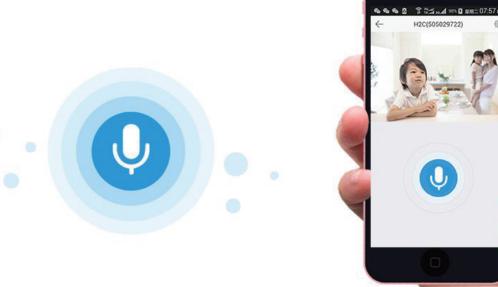



Instant alerts (manual activation required)

The C6P (ez360 Pano) watches for movement. It will take a picture and send alerts to your smartphone when it detects motions.



Durable metal body

Built with high-strength and anti-corrosion aluminum.



Specifications Model CS-CV346-A0-7A3WFR

Camera

Image Sensor 3 Megapixel 1/2.8" Progressive Scan CMOS

Minimum illumination 0.01 lux @(F2.2,AGC ON), 0 lux with IR

Shutter Speed Self-adaptive shutter

Lens 1.2mm@ F2.2, Horizontal angle: 180°

Diagonal angle: 180°

Lens Mount M12

Day & Night IR-cut filter

DNR 3D DNR

WDR Progressive WDR

Compression

Video Compression H.264

H.264 Type Main Profile

Video Bit Rate HD, Balanced and Smooth. Adaptive bit rate.

Image

Max. Resolution 1344×1344

Image Settings Brightness, contrast, saturation, etc.

(configurable via EZVIZ Studio)

BLC Support

Network

Storage Supports MicroSD card (max. 128GB)

Smart Alarm Motion detection

Wi-Fi Pairing SmartConfig (Wi-Fi One-Key Configuration)/AP paring

Protocol EZVIZ Cloud proprietary protocol

Interface Protocol EZVIZ Cloud proprietary protocol

General Features Anti-Flicker, Dual-Stream, Heartbeat Messages, Mirror

Image, Password Protection, Watermark

Minimum Network Requirements

2M

Wi-Fi

Standard IEEE802.11a/b/g/n/ac

Frequency Range $2.412GHz \sim 2.462GHz/5.15GHz \sim 5.35GHz/$

5.725GHz ~ 5.825GHz

Channel Bandwidth Supports 20/40/80MHz

Security WEP, WPA/WPA2, WPA-PSK/WPA2-PSK

Transmission Rate 11b: 11Mbps, 11g: 54Mbps, 11n: 135Mbps

General

Power Supply DC 5V±5%
Power Consumption Max. 8W

IR Range MAX. 7.5meters

Product Dimensions 70mm x 70mm x 70.6mm (0.23ft x 0.23ft x 0.23ft)

Packaging Dimensions 109.5mm x 109.5mm x 123mm

Weight 0.489 lb. (222g)

Package Contents:

- C6P (ez360 Pano) X 1
- Base X 1
- 3 Meters Power Cable X 1
- Screw Kit X 1
- Power Adapter X 1
- Base Cover X 1
- Drill Template X 1
- Quick Start Guide X 1

Certificates

FCC/UL/IC/NOM/CE/RoHS/WEEE/REACH

Requirements

- Operating Conditions: -10°C ~ 45°C, Humidity 95% or less (non-condensing)