

## DS-KB6403-WIP Wi-Fi Video Doorbell



### Key Features

#### Basic Functions

- Video intercom function, supporting the audiovisual communication with the mobile App directly
- Self-adaptive IR supplement
- High-performance embedded SOC processor
- IP 54 standard

#### Video/Audio Functions

- HD video surveillance with ultra-wide angle (180°) and high performance CMOS, up to 1080P
- Noise suppression and echo cancellation
- H.264 video compression standard
- Low illumination
- Supports voice prompt
- Volume configuration via App

#### Other Functions

- Online upgrade via the mobile App
- Supports motion detection and video recording
- Supports the storage and playback via TF card
- Equipped with a backlit call button




- Equipped with a replaceable faceplate
- Equipped with a reset button

## Specifications

Model	DS-KB6403-WIP	
System parameters	Processor	High-Performance Embedded SOC Processor
	Operation system	Embedded Linux Operation System
Camera parameters	Image sensor	CMOS 2MP HD Colorful Camera
	Light sensitivity	Low Illumination
	Lens	f1.96 mm, F 2.2
	Field of view	180° (Horizontal), 96° (Vertical)
Video parameters	Video compression standard	H.264
	Video streaming	Main Stream: 1080P, Sub-Stream: VGA
	Wide dynamic range	WDR
Audio parameters	Audio streaming	Two-Way, Full Duplex
	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio compression standard	G.711 U
	Audio compression rate	64 Kbps
	Audio quality	Noise Suppression and Echo Cancellation
Light supplement	Light supplement mode	IR Supplement
	Wavelength	940 nm
Network parameters	Network protocol	TCP/IP, RTSP
	Network interface	1 Wireless Interface (Wireless Network Card), Supporting 2.4 GHz
Event	Motion Detection	Supported
Alarm	Motion Detection	Supported
Device interfaces	TF card	Max. 128 G
	Button	1 Call Button, 1 Reset Button
General	Ingress protection level	IP 54
	Power supply	12 VDC
	Power consumption	Max. 0.6 A
	Working temperature	-30° C to +50° C (-22° F to 122° F)
	Working humidity	10% to 90%
	Dimensions	122.4 mm x 45.9 mm x 28.1 mm (4.82" x 1.81" x 1.11")

**Typical Application**

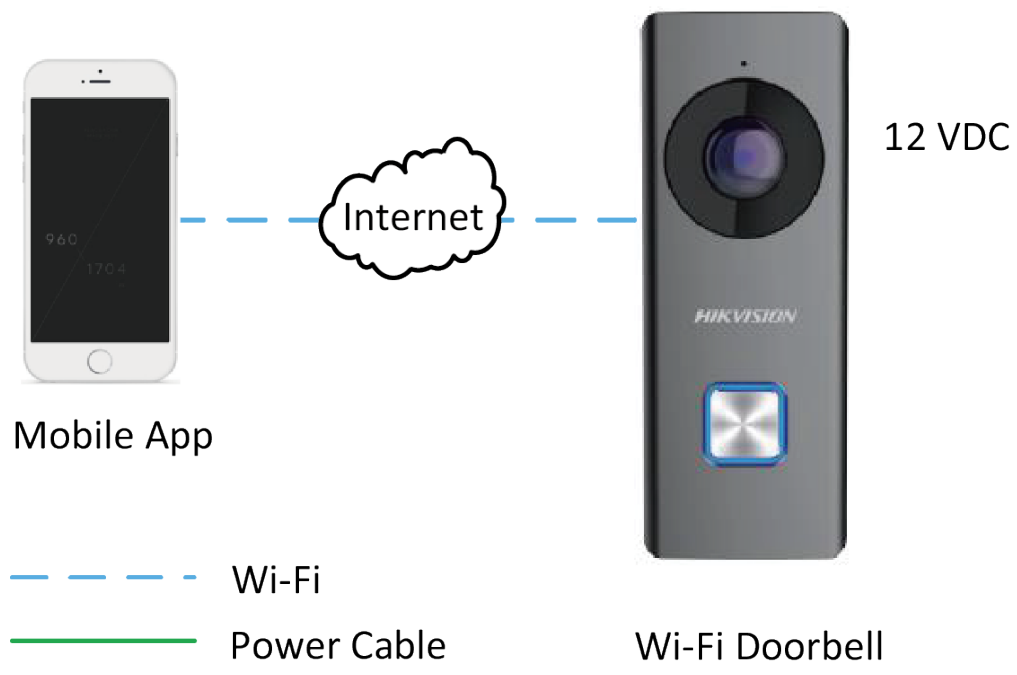

**Available Model**

DS-KB6403-WIP

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com