

DS-PWA32-H(S)(G)(R)

AX Series Wireless Security Control Panel

AX series wireless security control panel, containing 32 wireless zones, supports Wi-Fi, LAN, GPRS, and 3G/4G communication methods, as well as ISAPI, Ehome 5.0, and DC09 protocol. It is applicable to the scenarios of market, store, house, factory, warehouse, office, etc.




Key Feature

- Supports dual path communication of alarm events and other signals over LAN, Wi-Fi, GPRS and 3G/4G utilising a main and backup channel
- Supports up to 32 wireless inputs, 32 outputs, 8 keyfobs, 4 sirens, 4 wireless keypad, and 4 wireless tag reader
- IVaas (Intruder Verification As A Service) :Support up to 2 channel 7 seconds pre/post alarm recording for Video Verificaiton (Hikvision IP camera/3rd party IP camera support ONVIF)
- Uploads alarm events to dual alarm receiving center.
- Supports viewing event video via mobile client and email
- Supports doorbell function: The detector rings like a doorbell when it is triggered in disarming status
- Voice prompt for configuration and operation
- Configuration via web client, mobile client, or client software
- Operation via client software, mobile client, and SMS
- Pushes alarm notification via messages, phone calls, and email
- SIA-Contact ID protocol compatible
- Long distance two-way communication (800m in open area)
- AES-128-bit data encryption
- Supports LED indicator to indicates system status
- 4520 mAh lithium backup battery, supports up to 12h power supply
- Conforms to EN 50131 Grade2



Typical Application

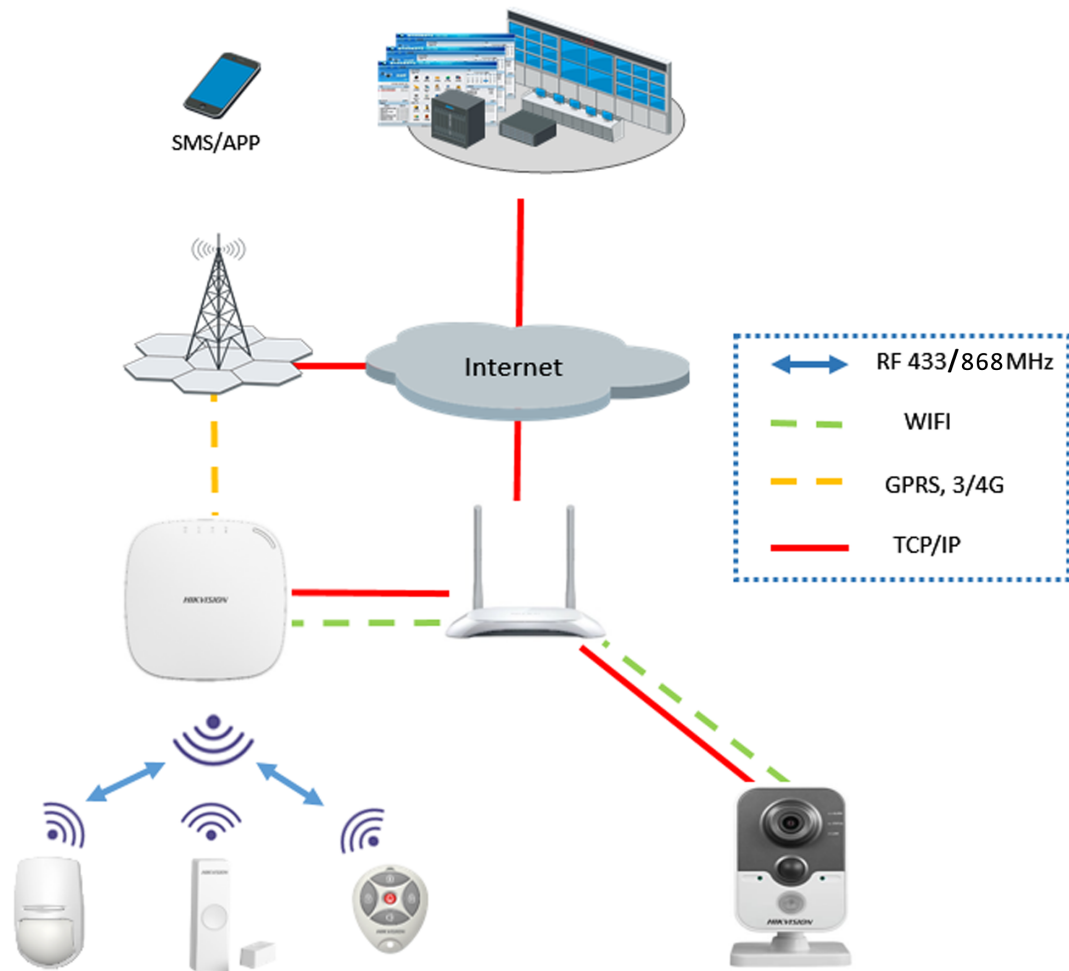

Specification

DS-PW32-H(R)(S)(G)		
Wireless Device Connection	Alarm Input	32
	Alarm Output	32
	Siren	4
	Keyfob	8
	Keypad	4
	Tag Reader	4
	Partition	4
Interaction	Audio Output	1, 1.5W
Alarm Center	Alarm Receiving Center	2
RF	RF Frequency	433/868MHz
	RF Modulation	2GFSK
	RF Distance	800m (Open Area)
Wired Network	Ethernet	10M/100M Self-adaptive
Cellular Network	GPRS, 3/4G	Supports reporting push-notification to ARC & Cloud, text notification via SMS, and audio notification via phone call
Wi-Fi	Standard	802.11b/g/n
	Encryption	Supported
	Channel	2.4 G
Application & Protocol	Application	iVMS-4200, and mobile APP
	Protocol	SIA - Contact ID ehome5.0
User	IC Card	12
	User	13 (1 installer, 1 administrator, and 11 general user)
Others	Power	5 VDC, 2A
	Operation Temperature	-10 °C to 55 °C
	Operation Humidity	10% to 90%
	Shell Material	PC+ABS
	Dimension(WxHxD)	155 × 155 × 35mm

Available Model

- DS-PWA32-H (Black/White)
- DS-PWA32-HS (Black/White): supports 3G/4G
- DS-PWA32-HR (Black/White): supports IC Card
- DS-PWA32-HSR (Black/White): supports 3G/4G and IC Card
- DS-PWA32-HG (Black/White): supports GPRS

- DS-PWA32-HGR (Black/White): supports GPRS and IC Card

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com