


connection

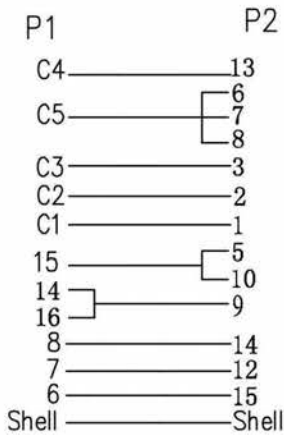

Testing:

1. 100% short circuit testing
2. Conductor Resistance : MAX=3 Ω
3. Insulation Resistance: 10M Ω /MIN. AT DC 300V

6	outside molding	PVC 45P	12g
5	inner molding	PVC 45	4g
4	screw	23*5.5MM	2pcs
3	cable	UL1007 28#	6Pcs
2	pin	DVI/M 24+5 nickle	1pcs
1	pin	VGA/F nickle	1pcs

epcom[®]
POWER ⚡ LINE

DVI 24+5male to VGA Female adapter