



Grandstream Networks, Inc.

GWN7000 QoS - VoIP Traffic Management



Table of Contents

INTRODUCTION.....	3
DSCP CLASSIFICATION.....	4
QUALITY OF SERVICE ON GWN7000.....	5
USING QOS TO PRIORITIZE VOIP TRAFFIC	9
Set QoS using IP Address	9
Set QoS using Source Port.....	13
Set QoS for a Network Group (using VLANs)	15

Table of Tables

Table 1: DSCP.....	4
Table 2: QoS Basic.....	6
Table 3: Upstream QoS.....	6
Table 4: QoS Policer	7

Table of Figures

Figure 1: Data & VoIP Prioritization.....	3
Figure 2: QoS Page	5
Figure 3: Prioritizing by IP Address	9
Figure 4: Fixing a Static IP	10
Figure 5: Static IP	10
Figure 6: Enable QoS.....	10
Figure 7: Create Traffic Class	11
Figure 8: Assign Class Priority to Conferencing System IP	12
Figure 9: Save and Apply Traffic Filter by IP	13
Figure 10: Prioritize SIP signaling	14
Figure 11: Prioritize by Source Port	15
Figure 12: Prioritizing by Network Group (VLAN ID)	15
Figure 13: Prioritizing Traffic by Network Group/VLANs	16
Figure 14: Prioritize Traffic on a Network Group.....	17



INTRODUCTION

QoS (Quality of Service) allows to prioritize data, slowing down less important data to allow more important or sensitive data to be prioritized first.

In a network where many devices and services are being installed and using same network resources, QoS can play a very important role in to prioritize and reliably deliver certain types of data such as voice or video in favor of file transfer for example.

QoS service uses DSCP classification and can be configured on GWN7000 in different ways; per IP address(es), per port(s) or per Network Groups.

This guide will show how to use GWN7000 in such environments where it is essential to prioritize VoIP traffic using over other types of data such as file transfer, HTTP...



Figure 1: Data & VoIP Prioritization



DSCP CLASSIFICATION

Differentiated Services (DiffServ) is a new model in which traffic is treated by intermediate systems with relative priorities based on the type of services (ToS) field. Defined in [RFC 2474](#) and [RFC 2475](#), the DiffServ standard supersedes the original specification for defining packet priority described in [RFC 791](#). DiffServ increases the number of definable priority levels by reallocating bits of an IP packet for priority marking.

The DiffServ architecture defines the DiffServ (DS) field, which supersedes the ToS field to make per-hop behavior (PHB) decisions about packet classification and traffic conditioning functions, such as marking, filtering, and policing.

Refer to below table for Layer3 and Layer2 classifications regarding the used application/service.

Table 1: DSCP


Application/Service	L3 Classification		L2 Classification
	Per-Hop-Behavior (PHB)	DSCP	CoS
Routing	CS6	48	6
Voice	EF	46	5
Multimedia Conferencing	AF41	34	4
Multimedia Streaming	CS4	32	4
Mission-Critical Data		25	3
Call Signaling	[AF31 CS3]	[26 24]	3
Transactional Data	AF21	18	2
Network Management	CS2	16	2
Bulk Data	AF11	10	1
Scavenger	CS1	8	1
Best Effort (Default)	0	0	0



QUALITY OF SERVICE ON GWN7000

The GWN7000 supports 802.1Q, 802.1p standards allowing to create multiple traffic classes, filter by port, IP address or network groups. Along with the support of DSCP Layer 3 marking and policing feature to help shape high downstream traffic.

QoS features are accessible from GWN7000's **WebGUI->Router->QoS**

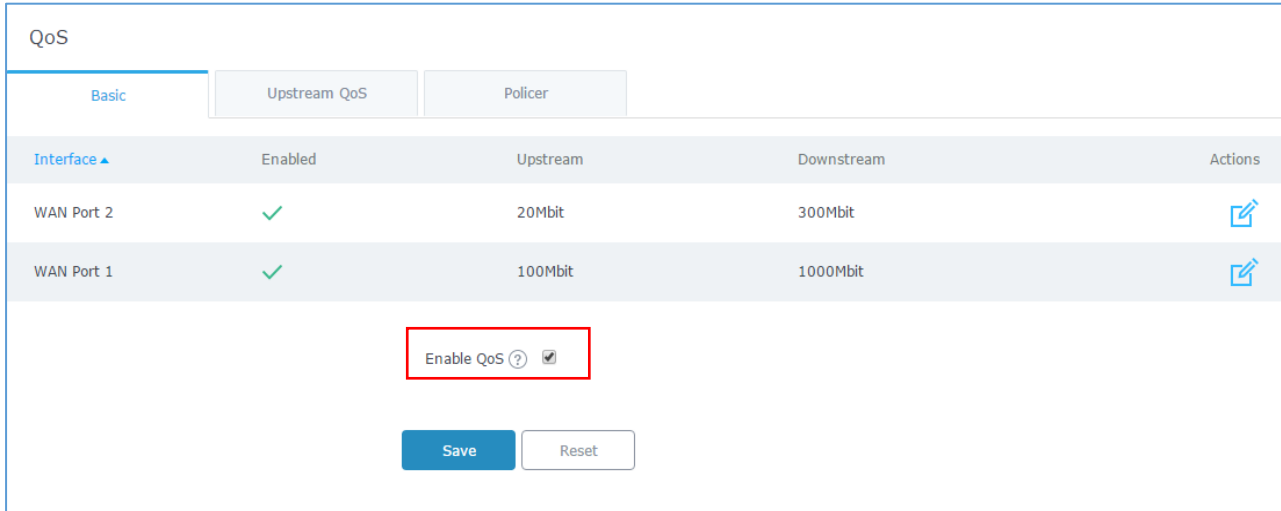

Interface ▲	Enabled	Upstream	Downstream	Actions
WAN Port 2	✓	20Mbit	300Mbit	
WAN Port 1	✓	100Mbit	1000Mbit	

Enable QoS

Save Reset

Figure 2: QoS Page

To activate QoS, check “**Enable QoS**”. Three tabs are available for configuration:

1. **Basic:** Download and upload bandwidth speeds settings on each WAN interface.
2. **Upstream QoS:** Upstream QoS allows creating Traffic Classes to prioritize traffic for specific resources on the network by controlling transmission/upload rate. Note that different traffic filters can be created and applied to classes to mark the packet with the DSCP value by respecting following conditions:
 - ✓ The total of Upstream bandwidth values of each created class should not exceed the upstream bandwidth value configured in **Basic**.
 - ✓ The remaining bandwidth will be lent to the class of traffic with the next priority.
 - ✓ All filter options are summed together.
3. **Policer:** While Upstream QoS is dealing with traffic transmission, Policer is controlling the incoming traffic. Thus, allowing to create rules to specific targets to set priority and received traffic rate, giving the GWN7000 the ability to drop the exceeding traffic when reaching the configured maximum rate.



Refer to the following tables for each tab option:

Table 2: QoS Basic

Enabled	Check to enable upstream and downstream bandwidth speeds for the selected WAN interface.
Upstream	<p>Set the upstream value to specify the upload bandwidth for selected interface. The value should end with “Mbit”, “Kbit” or with no unit if the set value is referring to “bit” unit.</p> <p>Note: This value will affect and limit the bandwidth values on created classes on “QoS Upstream”.</p> <p><u>Examples:</u> <i>500Mbit</i> <i>100Kbit</i> <i>500</i></p>
Downstream	<p>Set downstream value to specify the download bandwidth speed for selected interface. The value should end with “Mbit”, “Kbit” or with no unit if the set value is referring to “bit” unit.</p> <p><u>Examples:</u> <i>1000Mbit</i> <i>100Kbit</i> <i>500</i></p>

Table 3: Upstream QoS

Traffic Class	
Name	Define a name for the traffic class.
Priority	Set the priority of the traffic class. Lower values have higher priority. Valid range is between 1 and 64.
Interface	Select the WAN interface from which the traffic will be classified. Make sure to enable the desired interface from “QoS Basic” in order to appear.
Upstream	<p>Set Upstream bandwidth value. The value should end with “Mbit”, “Kbit” or with no unit if the set value is referring to “bit” unit.</p> <p>Note: The sum of created classes should have upstream bandwidth speeds lower than the Upstream bandwidth value configured on “QoS Basic”.</p> <p><u>Examples:</u> <i>100Mbit</i> <i>100Kbit</i> <i>500</i></p>



Traffic Filter	
Class	Select a class from created traffic classes using drop-down menu.
Name	Define a Name for the traffic filter rule.
DSCP	Choose the Differentiated Services Code Point (DSCP) value from drop-down list. Default is 0.
IP Source Address	Specify the Source IP address from which the traffic filter rule will be applied.
IP Destination Address	Specify the Destination IP address to which the traffic filter rule will be applied.
TCP Source Port	Specify the TCP Source port from which the traffic filter rule will be applied.
TCP Destination Port	Specify the TCP Source port to which the traffic filter rule will be applied.
UDP Source Port	Specify the UDP Source port from which the traffic filter rule will be applied.
UDP Destination Port	Specify the UDP Source port to which the traffic filter rule will be applied.
Group Source	Choose the LAN group of the specified Source IP address. If no Source IP address has been defined, the rule will be applied to all members of that LAN group.

Table 4: QoS Policer

Name	Define a Name for the Policer rule.
Interface	Select an interface from which the traffic will be policed. Make sure to enable the desired interface from “QoS Basic” in order to appear.
Priority	Set the priority of the traffic class. Lower values have higher priority. Valid range is between 1 and 64.
Rate	Set a Rate value for download bandwidth when applying policer rule.
DSCP	Choose the Differentiated Services Code Point (DSCP) value from drop-down list. Default is 0.
IP Source Address	Specify the Source IP address from which the policer rule will be applied.
IP Destination Address	Specify the Destination IP address to which the policer rule will be applied.



TCP Source Port	Specify the TCP Source port from which the policer rule will be applied.
TCP Destination Port	Specify the TCP Source port to which the policer rule will be applied.
UDP Source Port	Specify the UDP Source port from which the policer rule will be applied.
UDP Destination Port	Specify the UDP Source port to which the policer rule will be applied.
Group Source	Choose the LAN group of the specified Source IP address. If no Source IP address has been defined, the rule will be applied to all members of that LAN group.



USING QOS TO PRIORITIZE VOIP TRAFFIC

Traffic priority is a way of ensuring that specific applications or sub networks are guaranteed a certain amount of the uplink bandwidth at all times. Traffic priorities only come into play when the network is using all of the pre-configured bandwidth on the uplink.

For VoIP environments, network latency can be a big issue that can be caused by network congestions due to file transfer operations for example. Hence, making audio or video calls very hard to deal with where a delay can make the communication impossible, on the other hand; having a little delay on your downloaded file for example is not very critical to the network.

And since VoIP signaling or voice/video communications are very critical to most Enterprises in the age of Unified Communication, and does not require a very large bandwidth, is it very required to give these type of services a special treatment.

Set QoS using IP Address

In this section, we will show how to prioritize traffic for a specific IP within GWN7000 Network.

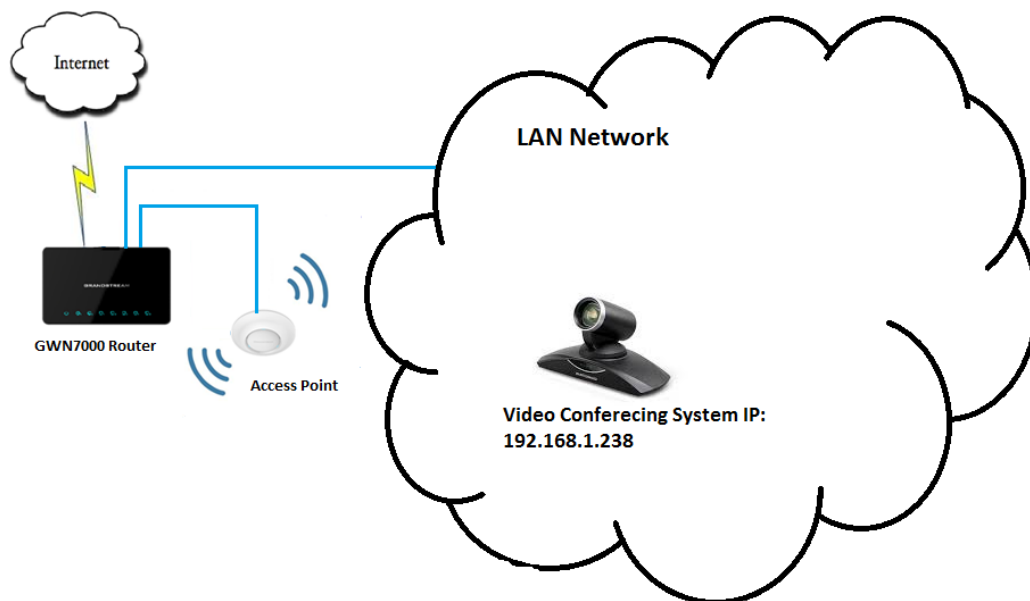


Figure 3: Prioritizing by IP Address

In above example figure, we will prioritize all traffic coming from GVC3200's IP address (Video Conferencing System) regardless of the service or port used on the conferencing System.



MAC	Hostname	Type	IP Address	Radio/Channel	Status	AP	Throughput	Aggregate	Actions
00:0B:82:7E:A1:75	GVC3200	Wireless	192.168.1.238	5GHz 157	Online 00:09:50	00:0B:82:8B:58:30	TX:228B/s RX:0b/s	TX:117.43KB RX:13.31KB	 

Figure 4: Fixing a Static IP

1. Supposing that the device is correctly connected to the a GWN7000 Network and has an IP, it is advised to set a static IP for the device in question.

To set a static IP for the device on which traffic need to be prioritized, go GWN7000 **WebGUI->Clients** and click on edit icon next to the device to set a static IP as shown in below figure.

User Configuration ✕

Status Configuration


Name ?

Fixed IP ?

IP Address

Figure 5: Static IP

2. Once set, go to **Router->QoS->Basic** and make sure that the related WAN port on which the device belongs to is enabled and has a “Downstream” and “Upstream” bandwidth values.
3. Check “Enable QoS” (a Reboot of GWN7000 will be required after finishing all QoS setup) and click on “Save”.

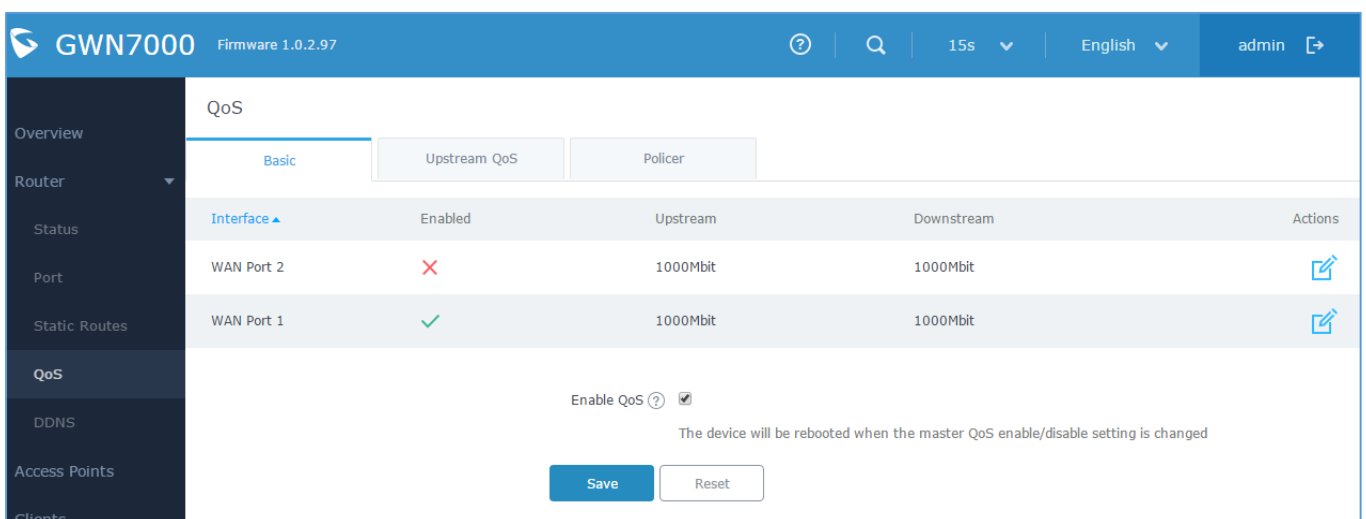

The screenshot shows the GWN7000 WebGUI interface. The top navigation bar includes the GWN7000 logo, firmware version 1.0.2.97, search, refresh, language (English), and user (admin). The left sidebar shows navigation options: Overview, Router, Status, Port, Static Routes, QoS, DDNS, Access Points, and Clients. The main content area is titled 'QoS' and has three tabs: 'Basic' (selected), 'Upstream QoS', and 'Policer'. Under the 'Basic' tab, there is a table with columns: Interface, Status, Upstream, Downstream, and Actions. The table shows two entries: 'WAN Port 2' with a red 'X' status and 'WAN Port 1' with a green checkmark status. Below the table, there is a checkbox for 'Enable QoS' which is checked. A note states: 'The device will be rebooted when the master QoS enable/disable setting is changed'. At the bottom, there are 'Save' and 'Reset' buttons.

Figure 6: Enable QoS



4. Go to **Router->QoS->Upstream QoS**.
5. On “Traffic Class”, click “Add” to create a traffic Class in order to set the priority, choose the WAN Interface set on previous step, and define the Upstream bandwidth value.

Note: Upstream bandwidth on each created class will be added together and should not surpass the Upstream bandwidth value set in **QoS->Basic**

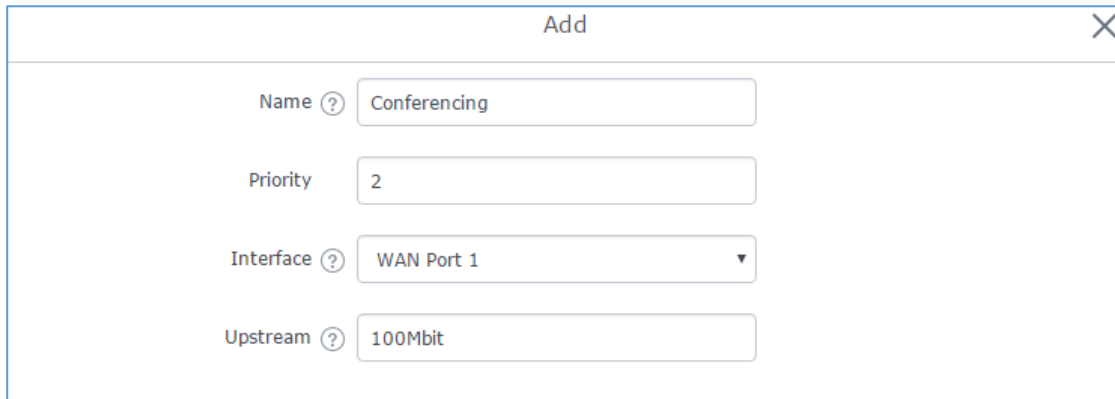


Figure 7: Create Traffic Class

6. After creating the traffic class, users will need to assign this class as Traffic Filter, hence on Traffic Filter section click on “Add” to create a new Traffic Filter.
7. Choose the Class from drop-down menu on “Class” field, in our example, we used Conferencing.
8. Set a Name for the Traffic Class, and choose the DSCP value (for conferencing purpose, it is advised to use 34 af41).
9. On “IP Source Address”, set the device’s IP address, in our example, the conferencing System has 192.168.1.238 as IP.

Add ✕

Note: the filters configured below will be ANDed together.

Class: Conferencing

Name: Traffic_Cnf

DSCP: -- please choose --

IP Source Address: 24 cs3
25
26 af31
27
28 af32
IP Destination Address: 29
30 af33
31
TCP Source Port: 32 cs4
33
34 af41
TCP Destination Port: 35
36 af42
37
UDP Source Port: 38 af43
39
40 cs5
UDP Destination Port: 41
42
43

Group Source: group0

Save Cancel

Figure 8: Assign Class Priority to Conferencing System IP

10. Save, Apply, and reboot the GWN7000 to take effect.



QoS

Basic | **Upstream QoS** | Policer

All + Add

Traffic Class

Name	Priority ▲	Interface	Upstream	Actions
Conferencing	2	WAN Port 1	100Mbit	

All + Add

Traffic Filter

Name ▲	Class	DSCP	IP Src Addr	IP Dest Addr	TCP Src Port	TCP Dest Port	UDP Src Port	UDP Dest Port	Actions
Traffic_Cnf	Conferencing	34	192.168.1.238						

Figure 9: Save and Apply Traffic Filter by IP

Set QoS using Source Port

Instead of prioritizing a specific IP address on the Network, it is also possible to prioritize traffic from a certain source port.

In below steps we will prioritize all traffic using 5060 and 5061 ports on UDP and TCP, which stands for SIP signaling, similar steps can be performed for any other ports depending on the service/protocol.

1. Similar to prioritizing by IP address, it is needed to enable QoS from **QoS->Basic**, and enable related WAN port.
2. Create a class with a priority and upstream bandwidth value from **QoS->Upstream**
3. Create a traffic filter in order to assign the class created in previous step.
4. In our example will set 5061 in TCP source port and 5060 in UDP source port, and setting the DSCP value to "26 af31" which recommended for VoIP signaling, as shown in below figure.



Edit ✕



Note: the filters configured below will be ANDed together.

Class	<input type="text" value="VoIP"/>
Name	<input type="text" value="Traffic_Cnf"/>
DSCP	<input type="text" value="26 af31"/>
IP Source Address	<input type="text"/>
IP Destination Address	<input type="text"/>
TCP Source Port	<input type="text" value="5061"/>
TCP Destination Port	<input type="text"/>
UDP Source Port	<input type="text" value="5060"/>
UDP Destination Port	<input type="text"/>
Group Source	<input type="text" value="-- please choose --"/>

Figure 10: Prioritize SIP signaling

5. Save, Apply, and reboot the GWN7000 to take effect.



Traffic Class				
Name	Priority ▲	Interface	Upstream	Actions
VoIP	1	WAN Port 1	50Mbit	 



Traffic Filter									
Name ▲	Class	DSCP	IP Src Addr	IP Dest Addr	TCP Src Port	TCP Dest Port	UDP Src Port	UDP Dest Port	Actions
Traffic_Cnf	VoIP	26			5061		5060		 

Figure 11: Prioritize by Source Port

Set QoS for a Network Group (using VLANs)

The GWN7000 offers the possibility to create different Network Groups separated by VLANs, this allows prioritizing the whole traffic on a certain network group using QoS.

This is useful in installation where data and voice for example are separated via VLANs through network groups.

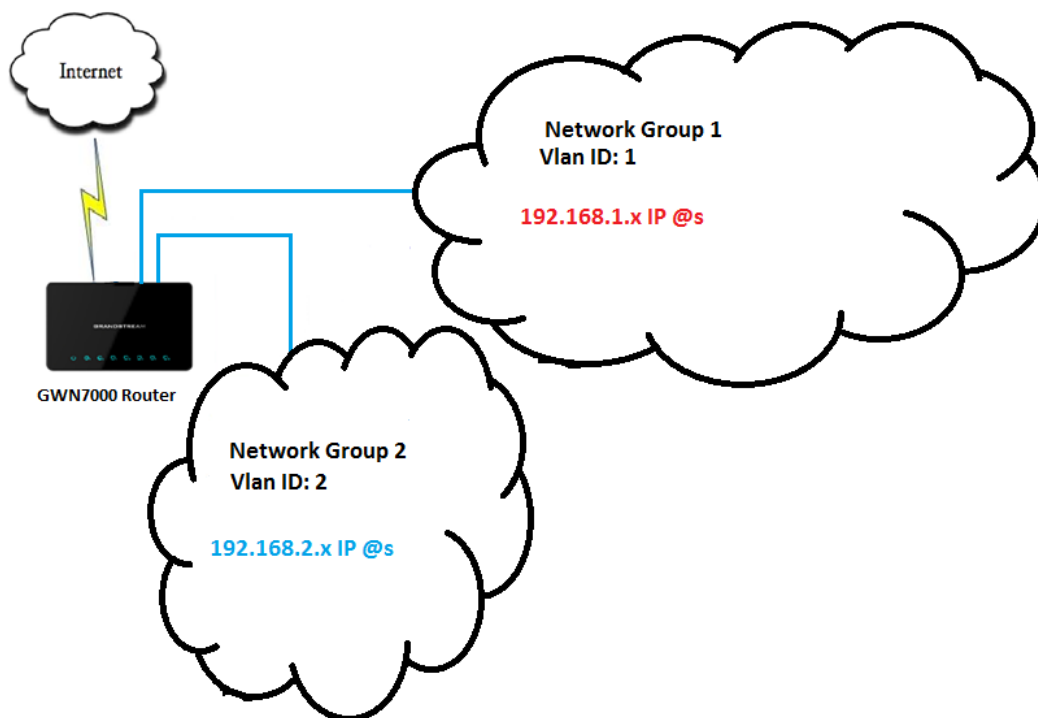



Figure 12: Prioritizing by Network Group (VLAN ID)



In above example figure we suppose that GWN7000 has two Network groups.

We will prioritize all traffic coming from Network Group 2, please refer to below steps for above example, and note that similar steps can be applied for any other network group:

1. Similar to prioritizing by IP address/Source Port, it is needed to enable QoS from **QoS->Basic**, and enable related WAN port.
2. Create a class with a priority and upstream bandwidth value from **QoS->Upstream**.
3. Create a traffic filter in order to assign the class created in previous step.
4. In our example will set “DSCP” value to “26 af31” which recommended for Transactional data, and choose Network Group 2 on “Group Source”, as shown in below figure.

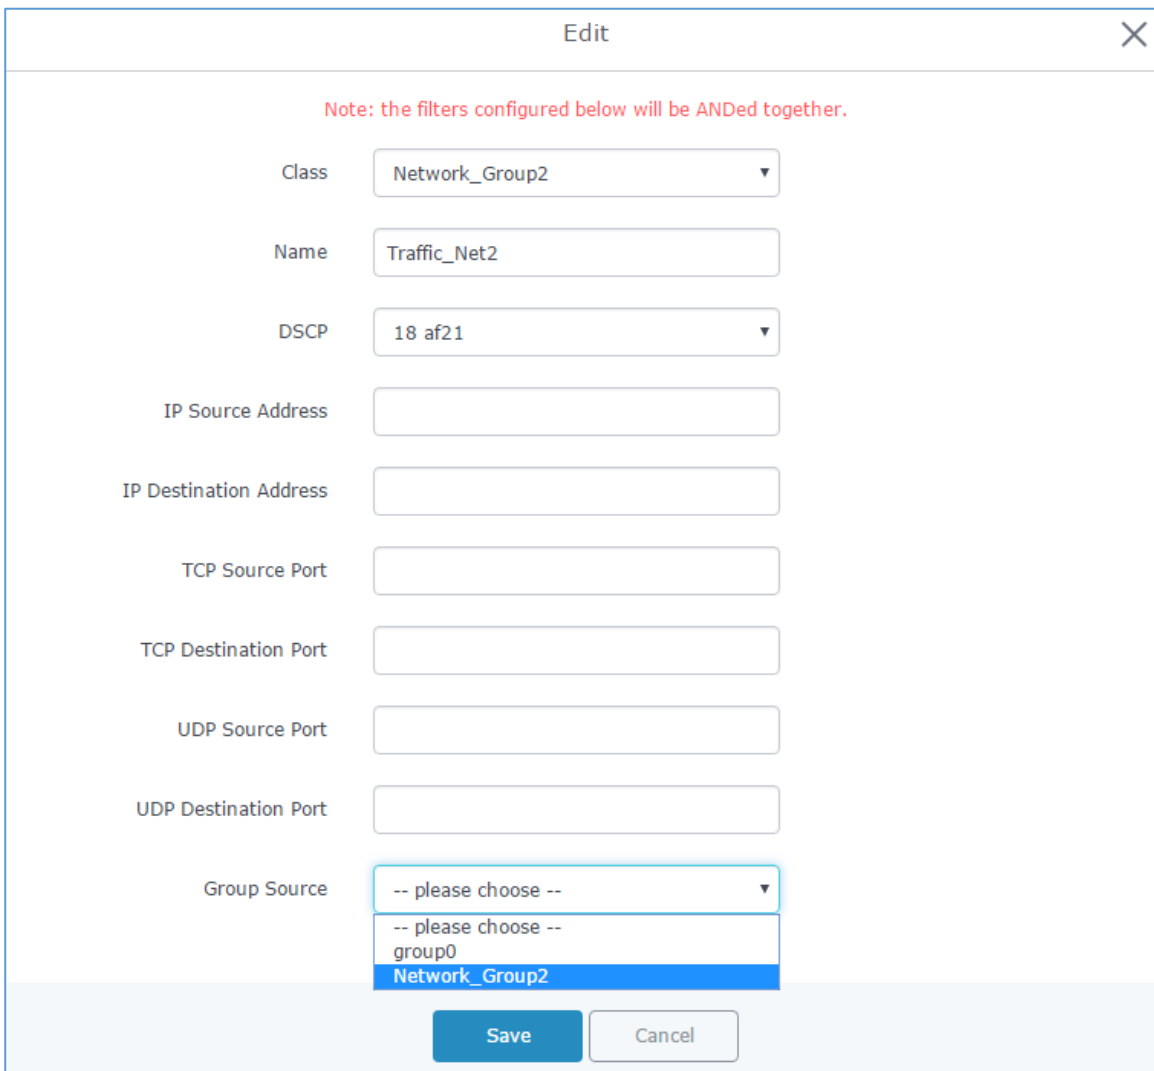

Edit ✕

Note: the filters configured below will be ANDed together.



Class	<input type="text" value="Network_Group2"/>
Name	<input type="text" value="Traffic_Net2"/>
DSCP	<input type="text" value="18 af21"/>
IP Source Address	<input type="text"/>
IP Destination Address	<input type="text"/>
TCP Source Port	<input type="text"/>
TCP Destination Port	<input type="text"/>
UDP Source Port	<input type="text"/>
UDP Destination Port	<input type="text"/>
Group Source	<input type="text" value="-- please choose --"/> <ul style="list-style-type: none"> -- please choose -- group0 <li style="background-color: #007bff; color: white;">Network_Group2

Figure 13: Prioritizing Traffic by Network Group/VLANs



5. Save, Apply, and reboot the GWN7000 to take effect.

Traffic Class

Name	Priority ▲	Interface	Upstream	Actions
Network_Group2	2	WAN Port 1	500Mbit	 

Traffic Filter



Name ▲	Class	DSCP	IP Src Addr	IP Dest Addr	TCP Src Port	TCP Dest Port	UDP Src Port	UDP Dest Port	Actions
Traffic_Net2	Network_Group2	18							 

Figure 14: Prioritize Traffic on a Network Group

