

Coax Cable Splitters, 75 Ohm

SKUs: 850034, 850035, 850036

Product Web Page:



850034



850035



850036

FEATURES

- 698-2700 MHz Band
- Cellular mobile communication
- Low insertion loss, low VSWR
- High isolation, low ripple
- Microstrip structure

 Warning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



850035 3-Way Splitter



850036 4-Way Splitter



850034 2-Way Splitter



Specifications

ELECTRICAL SPECIFICATIONS

Model	850034	850035	850036
Frequency (MHz)	698-2700		
Splitter Loss (dB)	3.0	4.5	6.0
Insertion Loss (dB)	0.4	0.5	0.6
VSWR	≤2.0:1	≤2.3:1	≤2.4:1
Isolation (dB)	≥20		
Power Capacity (W)	50		
Impedance (Ohm)	75		

MECHANICAL SPECIFICATIONS

Model	850034	850035	850036
Connector	F-Female		
Dimensions (LxWxD in.)	3.6 x 3.5 x 0.8	4.0 x 4.7 x 0.8	4.0 x 4.7 x 0.8
Weight (oz)	7.04	10.88	11.04
Operating Temperature (°F)	-40-140		

Dimensions

850034
3.6" L x 3.5" W x 0.8" H | 7.04 oz.
850035
4.0" L x 4.7" W x 0.8" H | 10.88 oz.
850036
4.0" L x 4.7" W x 0.8" H | 11.04 oz.


Package Dimensions

850034
4.5" L x 4.0" W x 1.25" H | 0.530 lbs.
850035
5.0" L x 4.5" W x 1.0" H | 0.800 lbs.
850036
5.0" L x 4.5" W x 1.0" H | 0.900 lbs.


Master Carton Dimensions

850034
16" L x 12" W x 6" H | 14 lbs. | Qty. 30
850035
16" L x 12" W x 6" H | 19 lbs. | Qty. 30
850036
16" L x 12" W x 6" H | 29 lbs. | Qty. 30

FOR PARTNER'S USE

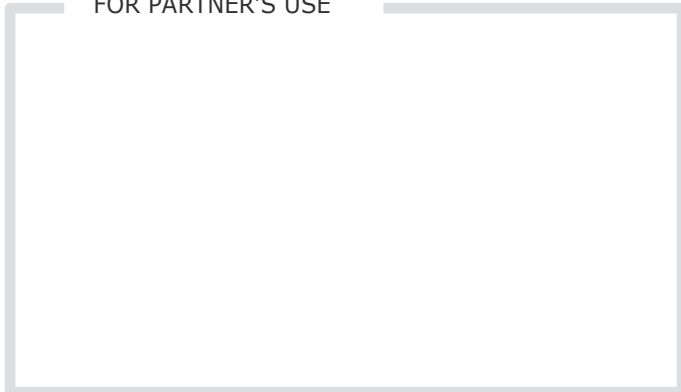

Support

 2 Year Warranty

Email: support@wilsonelectronics.com

Website: <http://support.weboost.com>

Phone: +1 866 294 1660

Monday to Saturday

UPC

