

Warranty

► **To receive after service, have the following ready before you contact our branches.**

1. Name of the product.
2. Model number of the product.
3. The area of problem.
4. Phone number and address at which you can be contacted.

Warranty Card

PRODUCT	
MODEL	
DATE PURCHASED	
WARRANTY PERIOD	
AGENCY ADDRESS	

► **KOCOM Warranties the original purchaser of this product as follows.**

- 1) This product is produced under strict quality control and inspection procedures.
- 2) If this product breaks down during proper use as a result of product defect, KOCOM will repair it within one year from date of purchase free of charge.
- 3) The following cases will be subject to charge, even during warranty period:
 - a. Breakdown during transport, or through careless treatment, by consumer.
 - b. Breakdown cause by unauthorized repair, or system modification.
 - c. Breakdown caused by natural disaster or power disorder.



http://www.kocom.com

E-mail : export@kocom.co.kr

This manual is based on the date as shown in the right and specifications are subject to change without notice for quality improvement

KIP-300 MANUAL

INTERPHONE


- 2-wire Non-Polarity
- Slave Interphone



Thank you very much for your purchasing of our product. Please read carefully before operating and then keep it. Thank you.



Name of Devices

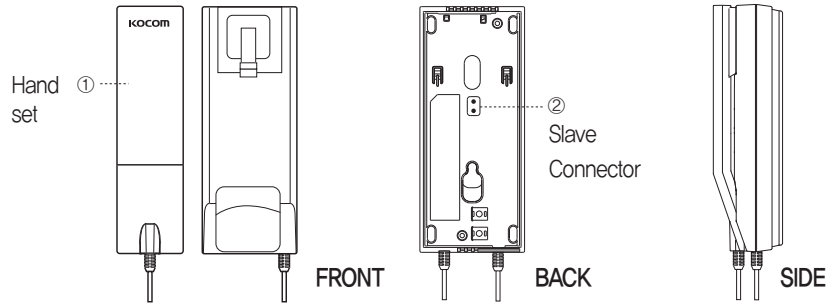


Product Functions

Model No.	KIP-300
Input Power	supplied by DC 24V Slave.
Power Consumption	Under 2W during Operation
Call Mode	Handset Call
Wiring Specification	2-Wire(slave) Non-Polarity
Size	(W)75mmX(H)176mmX(D)52mm


How to Install

Interphone Installation

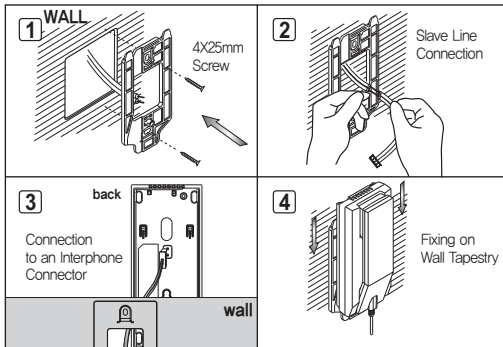


- 1 Install an "Interphone Wall-mounting Tapestry" on a wall.
- 2 Connect a "Slave Connector" to the wire installed.
- 3 Connect a "Slave Connector" to the connector on the backside of an interphone.
- 4 Install an interphone on an "Interphone Wall-mounting Tapestry" and then fix it.

Wiring Diagram

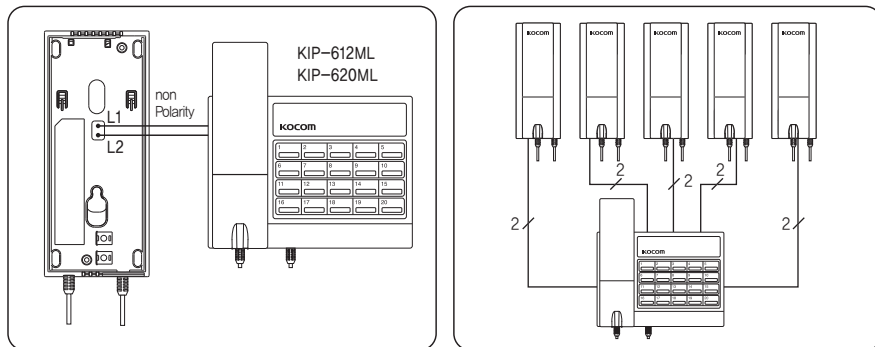


- To connect a wiring code to a terminal, loose a screw, connect the end of a cord to the bottom of the screw and then fix it.
- To fix a wiring code, fix it with a stapler not to damage the cord.
- To use the existing wire, be careful of disconnection and short circuit.

Product Composition

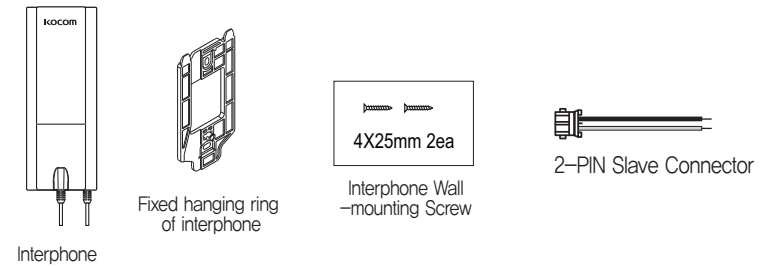

How to Operate

Paging and Calling from a Slave to Interphone

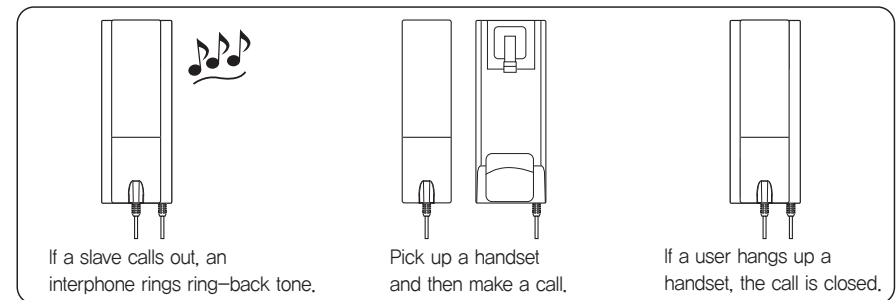

Paging and Calling from an Interphone to a Slave

