


Version	Explain	Date
A		2014.12.09

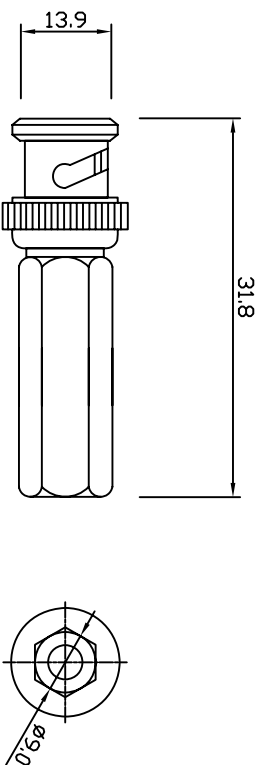

Technical parameters:

Working temperature: $-55^{\circ}\text{C} \sim 155^{\circ}\text{C}$

Relative humidity: $\leq 95\%$ (40°C)

Main technical characteristics:

Frequency range: 0-4hz

Working voltage: 500v (50hz rms)

Standard retention: $\geq 0.25\text{N}$

Pullout force: $\leq 20\text{N}$

Contact resistance: $\leq 2.5\text{m}\Omega$

Insulation resistance: $\geq 5000\text{m}\Omega$

Standard withstanding voltage: 1500V (50hz rms)

Mechanical durability: 500 times

Elastic parts: beryllium bronze, gold-plated

phosphor

bronze, silver plated

Inelastic parts: Nickel-plated brass

Insulating medium: PTFE

Sealing ring: silicone rubber

general tolerance	CUSTOMER:	CUST NO:	PART NO:	
X	PRODUCT NO:	TT-RG92		
X.X	BNC Male Hexagonal	DRAWING SIZE		
X.XX		CHECKED BY	UNIT	1:1
X.XXX		APPROVED BY	PAGE	mm
	SORTING NO.			

