

## Description

The W alarm panel can be connected to an supervised, indoor wired siren.

Installing that WIS100 siren does not affect the use of other Videofied® wireless sirens (indoor and outdoor).

## Properties

### Power

2 non-polarized wires connected to the W panel

Operating voltage	3.3 V - 4.1 V
Nominal Voltage	4.1 V
Average current	160 mA
Max current	400mA

### Power source

From the panel

### Type of sound

Single tone

### Output level

100 dBA at 1m

### Duration

3 min by default  
(15 min max according to local legislation)

### Tamper

Wall and cover tamper

### Supervision

Short circuit, open circuit and over current detection

### Protection marking

IP31 / IK06

### Locking

Locking screw

### Operating temperature


-10°/+55°C

### Maximum relative humidity

75%, non-condensing

### Dimensions

144 mm x 76 mm x 44mm (LxWxD)

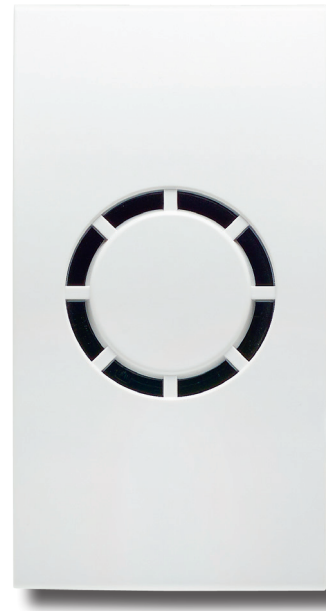

## Standards and certifications



EN50131-4

2009 Grade 2

EN50130-4

2011

EN50130-5

2011 Class II

### EMEA SALES

23, avenue du Général Leclerc  
 92340 BOURG-LA-REINE  
 FRANCE  
 E-Mail : emeasales@rsivideotech.com

### North American Headquarters

1375 Willow Lake Blvd, Suite 103  
 Vadnais Heights, MN 55110  
 USA  
 E-Mail : usasales@rsivideotech.com

