


## **ENVIROALERT.**

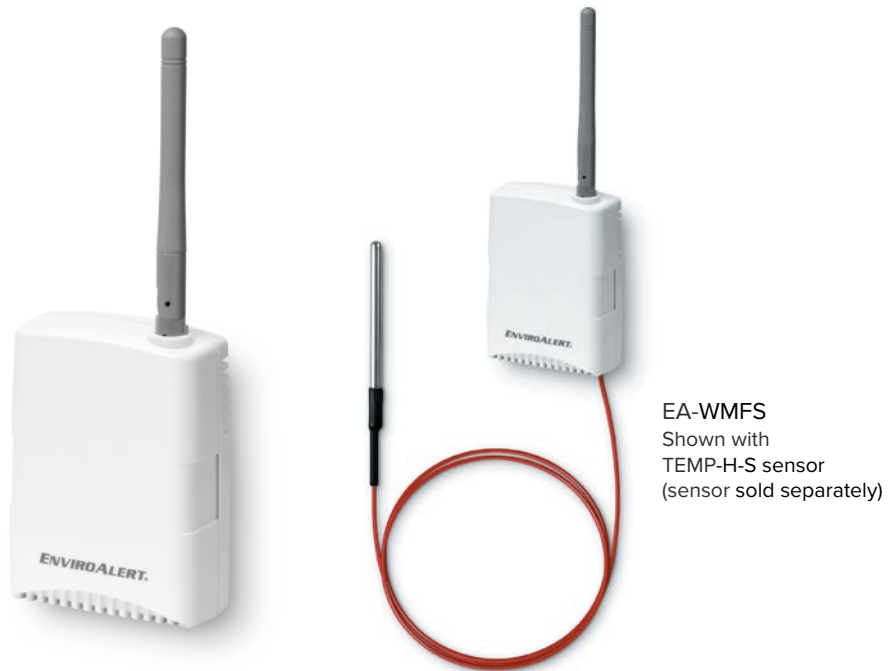

### Wireless Multi-Function Accessory for EnviroAlert EA800-ip

- Transmission distance of 1,000' (305 m) line-of-sight.
- Set temperature high/low set points on EnviroAlert console.
- Do not put EA-WMFS in freezer/cooler. Use wired sensor.
- Max probe cable run: 1,000' (305 m) [22 AWG twisted pair]

## Specifications

Sensing Range	Remote sensor dependent - requires remote sensor for operation.
Power Requirements	2 - AA Alkaline Batteries or 12 VDC @ ≤100mA
Battery Life	Alkaline up to 1 year (not included)
Unit Operating Range	32° to 122° F (0° to 50° C) Non-condensing environment.
Frequency	2.405 GHz - 2.480 GHz, 16 channels. See owner's manual for more information.
Transmission Distance	1,000' (305m) line-of-sight
Weight	0.25 lb (0.11 kg)
Dimensions	3.67 x 2.65 x 1.17" (9.3 x 6.7 x 2.9 cm)
Mounting	Surface Mount

## Requires sensor for operation

### Accessory sensors:

#### Detection

Temp Ultra Low (White) Stainless Steel  
 Temp Low (Blue) Stainless Steel  
 Temp Low (Blue) Waterproof  
 Temp High (Red) Stainless Steel  
 Temp High (Red) Waterproof  
 Water Surface Sensor (supervised)  
 Water under Carpet (supervised)  
 PS-110 Power Out Alert

#### Model

TEMP-UL-S  
 TEMP-L-S  
 TEMP-L-W  
 TEMP-H-S  
 TEMP-H-W  
 W-S-S  
 W-UC-S  
 PS-110

#### Number Range

-112° to 32° F (-80 to 0° C)  
 -58° to 158° F (-50 to 70° C)  
 -58° to 158° F (-50 to 70° C)  
 32° to 299° F (0 to 150° C)  
 32° to 221° F (0 to 105° C)

#### N.O./N.C. devices

Accessory for  
EnviroAlert EA800-ip



Visit [www.winland.com](http://www.winland.com), call 800.635.4269 or email [info@winland.com](mailto:info@winland.com) to learn more.

