

CONTACTO MAGNETICO / SWITCH **S FIRE**

...


Montaje Empotrable

Especificación **SF-1012**

- * 3/8" de Diámetro
- * Montado en ventanas y puertas (Empotrable)
- * Presionar el contacto para encajar
- * Cable calibre 18 o 22
- * Cables especiales verificar especificación
- * Uso con magneto



Dimension (mm)

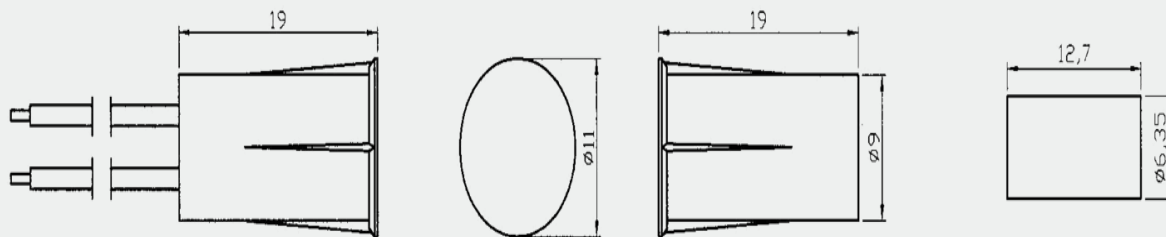

Order Information

Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)]	Depature Gap [Inch(mm)]	Maximum Initial Contact Resistance (Ohm)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
SF-1012	Cerrado	N/O	3/4 (19)	0.8 (20)	0.150	12	0.5